

12R150X37-CLQ6B-RGBW family are LED modules based on the CREE LED® CLQ6B-TKW® optimized for cost effective and high efficacy applications. 12R150X37-CLQ6B-RGBW modules are providing optimized and easy integration, with excellent quality, reliability and precision.

High efficacy **150 lm/W** and up to **1845 lm**.

LM-80 lifetime projections (IEC 62717)
> 36,300 (L70B10)*

EPREL registered product



➤ **SPECIFICATION**

LED FAMILY CHANNEL COLOUR	CLQ6B-TKW SERIES			
	WHITE	RED	GREEN	BLUE
CCT/SDCM	3000K 3-STEP	619-624 nm	520-535 nm	460-475 nm
Viewing Angle	120°			
Nominal Module Lumen Output**	516 lm	174 lm	390 lm	114 lm
Nominal Efficacy	147 lm/W	70 lm/W	108 lm/W	31 lm/W
CRI	80	---		
Voltage DC (typ.)	35 V	25 V	36 V	37 V
Voltage DC (max)	37 V	27 V	40 V	41 V
Power Consumption	3,4 W	2,5 W	3,6 W	3,7 W
Max Module Lumen Output (720 mA)**	1845 lm	595 lm	1160 lm	320 lm
Max. LED module working current ***	720 mA / channel			
Max power	26,5 W	19,5 W	29 W	29,5 W
Number of LEDs	12			
Power Supply Type	Constant Current			
Risk Group Classification	RG-2 Moderate Risk			
Energy Class	D	-	-	-
Operating Temperature	-30°C ÷ +60°C			
Tc max.	85°C			
Lifetime*/Tc life	>36300 h 55°C, 150 mA			

* Lifetime of LEDs as declared by the manufacturer [CREE LED®](#) according to IES LM-80-2015 Testing Results.
 ** Source performance in real-life conditions at T=55°C; the tolerance of source lumen output is 10% - tested without heatsink.
 *** External heatsink required.

➤ **FEATURES**

Application:

- ❖ Decorative lighting
- ❖ Accent lighting
- ❖ Task lighting
- ❖ General lighting
- ❖ Recessed furniture LED spotlight

EPREL Database link
QR Code

Feature:

- ❖ The module is dimmable by current set (0-100%)
- ❖ Long Lifetime
- ❖ Energy Saving


3000K





2620065





➤ **TYPICAL SPATIAL DISTRIBUTION**

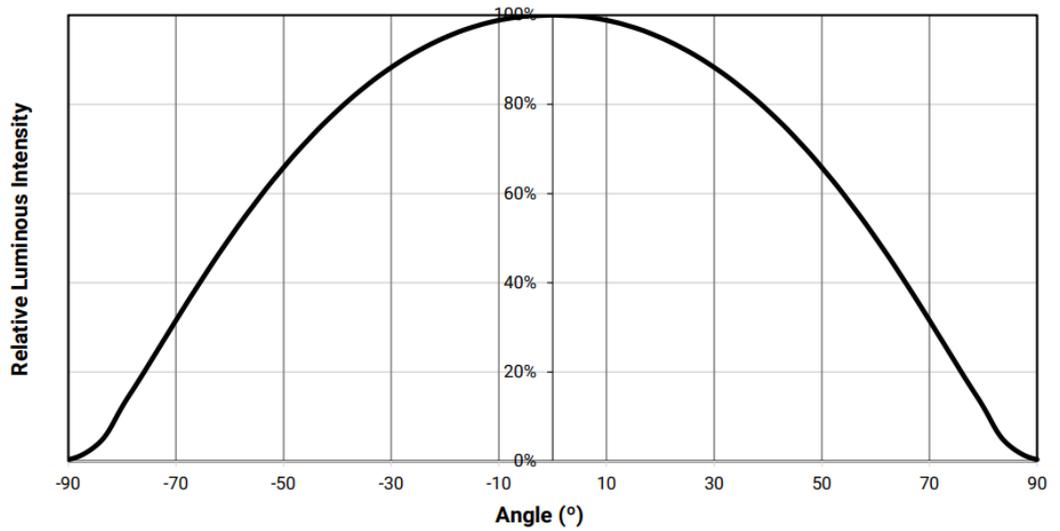



➤ **RELATIVE LUMINOUS INTENSITY VS. FAR FIELD PATTERN**

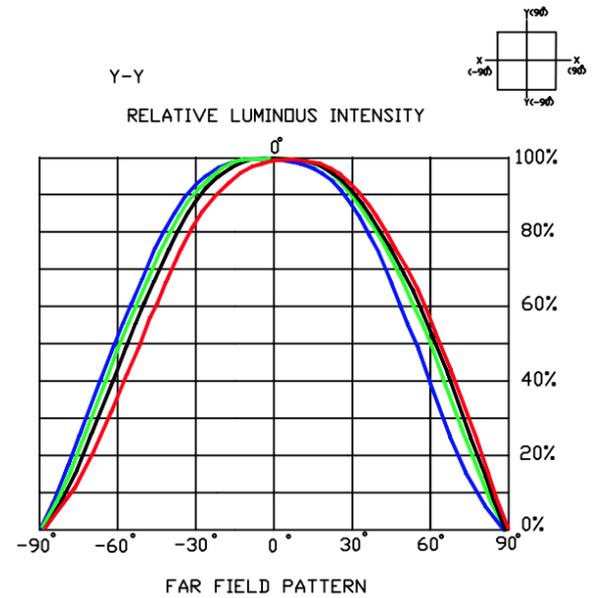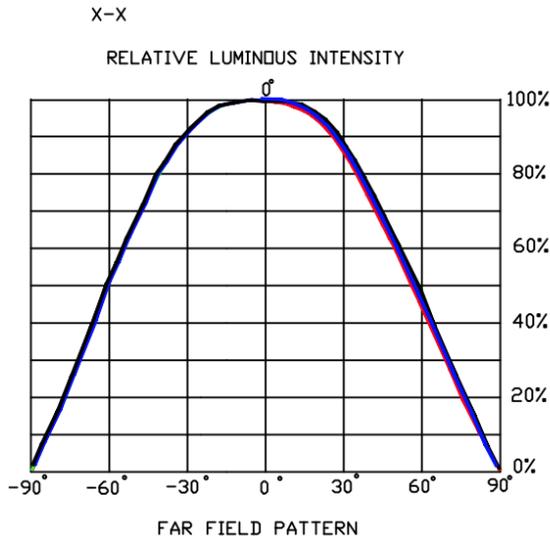


➤ **RELATIVE LUMINOUS FLUX VS. FORWARD CURRENT**

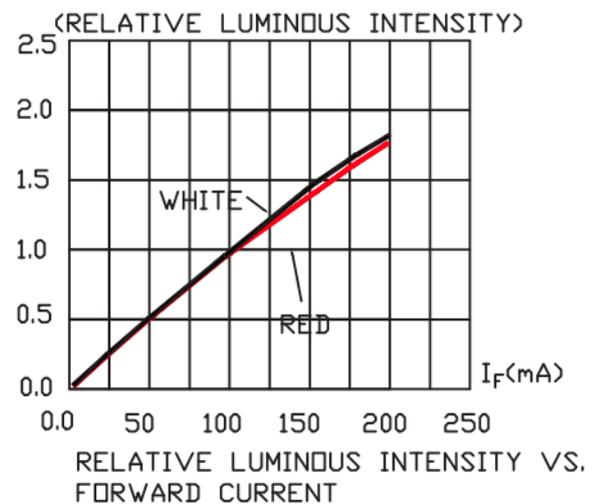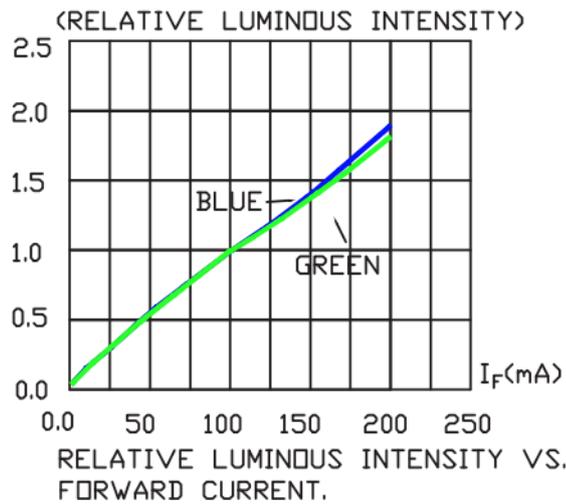


➤ **FORWARD VOLTAGE VS. FORWARD CURRENT**

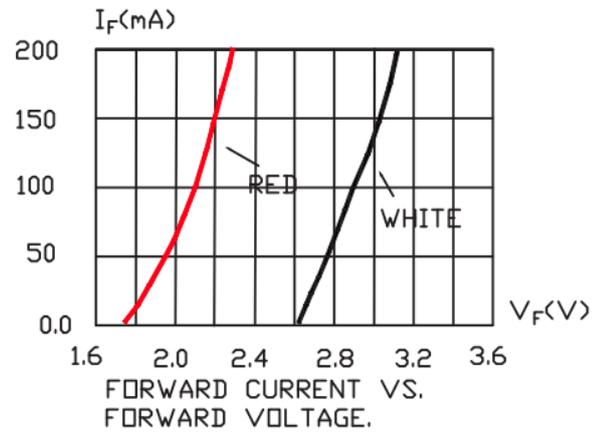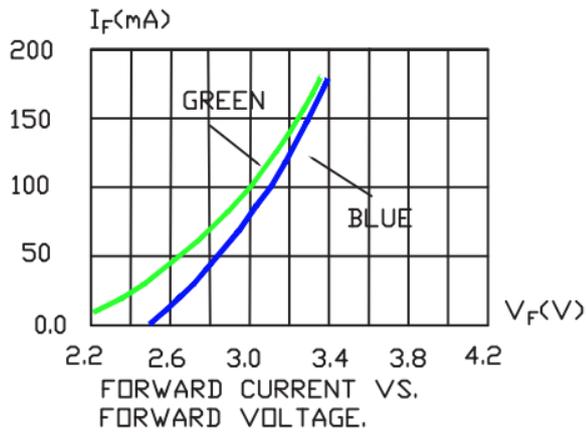

➤ **FORWARD CURRENT VS. AMBIENT TEMPERATURE**

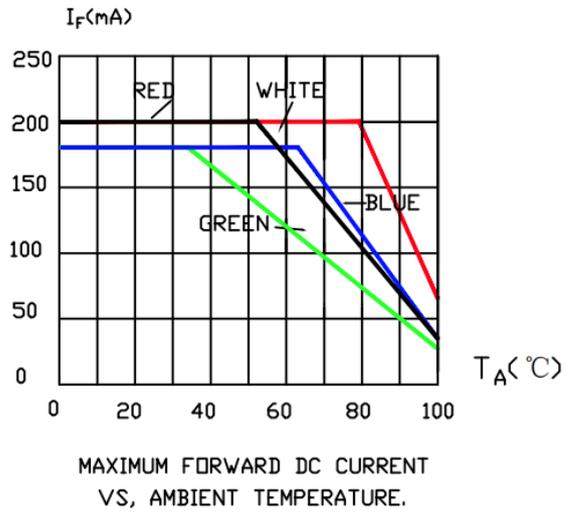


➤ **DIMENSIONS**

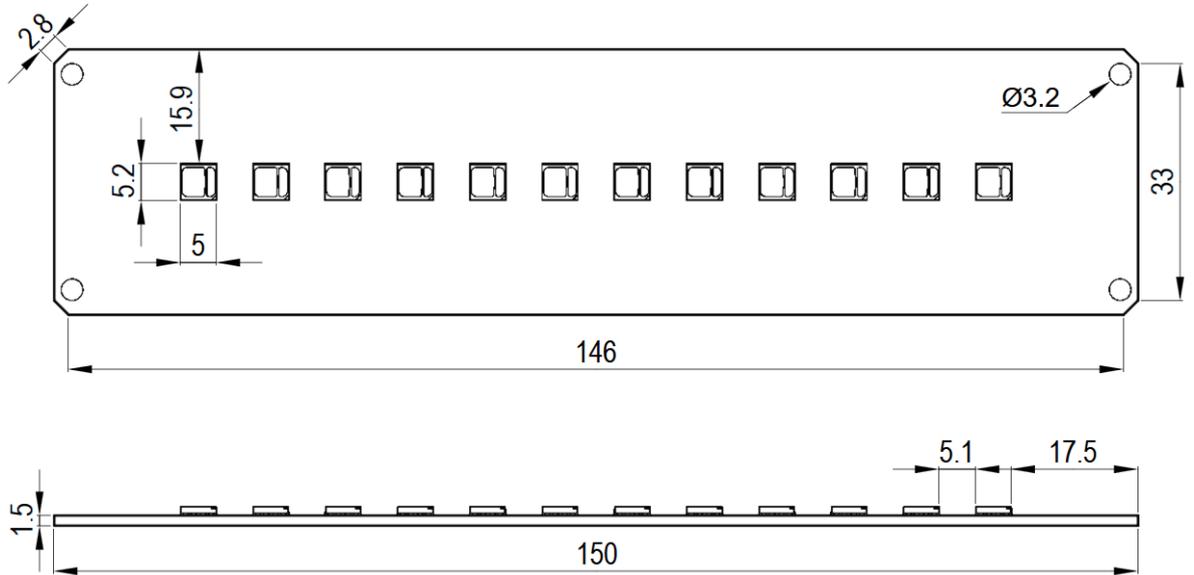

Notes:
Drawing is not to scale.
All dimensions are in millimeters.

MECHANICAL SPECIFICATION	
Dimensions	150X37 mm
Board Thickness	1.5 mm
Board Material	FR4, white soldermask
Shape	Rectangular

➤ **ELECTRICAL INSTALLATION**

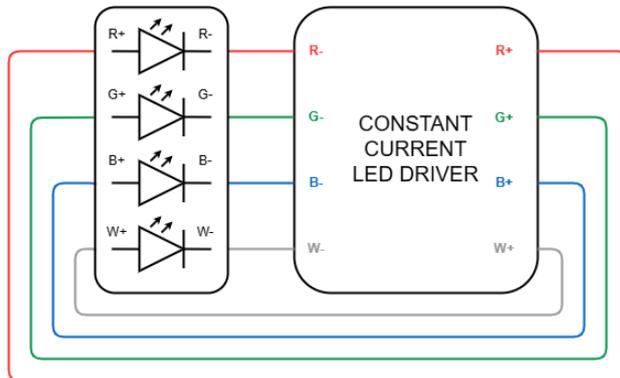


➤ **ORDERING CODE**

ORDERING CODE / ARTICLE CODE	DESCRIPTION
MOD-12E150X37-CLQ6B-RGB30-VA01	LED Module, High Efficacy, white soldermask, 12 LED, 150x37 mm, CLQ6B-TKW, White – 3000K CRI 80, RGBW

➤ **COMMERCIAL INFORMATION**

COMMERCIAL INFORMATION	
Minimum Order Quantity	10 pcs.
Warranty	2 years

➤ ELECTRICAL SCHEMA

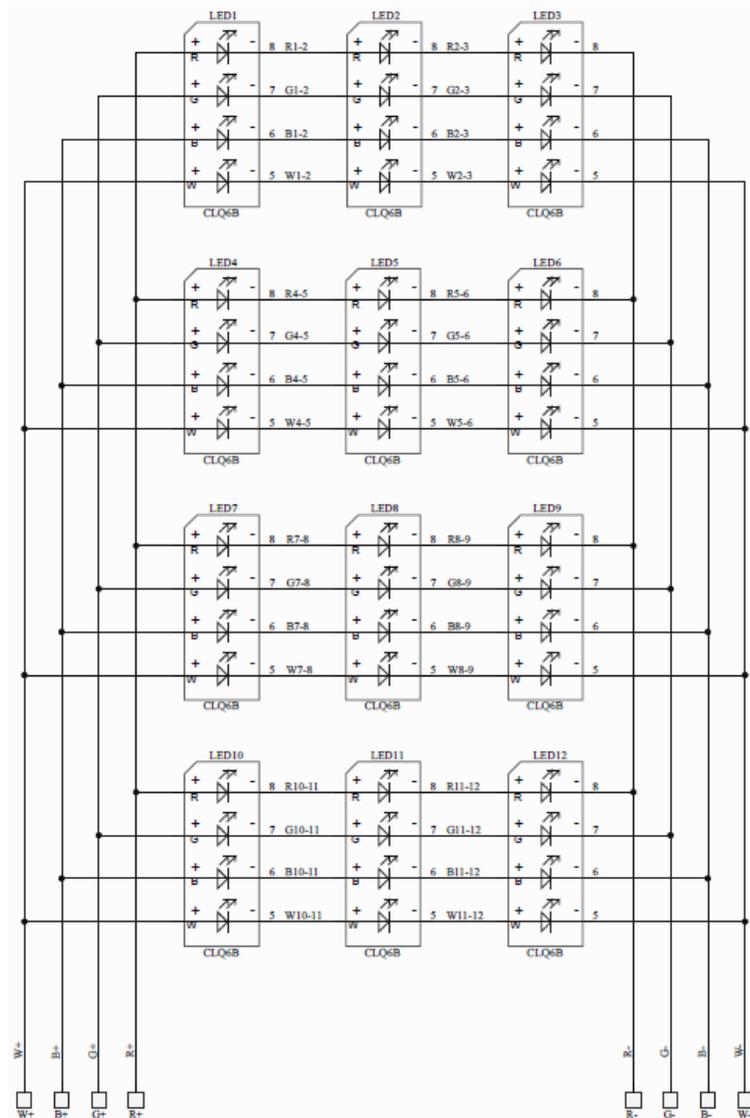

➤ GENERAL TERMS OF USE

1. The range of acceptable input voltages must include the expected voltage dropout across the LED string check on CREE LED [Website CLQ6B-TKW SERIES®](http://www.cree-led.com)
2. Connecting to the power supply should be done when the power supply is off.
3. Modules should be connected to heatsink to dissipate heat form LED module. Temperature on the module shouldn't be higher than recommended by Cree®. Due to power of the module, appropriate heatsink should be used with thermal conductive tape or paste. The lower temperature on LED module causes longer lifetime.
4. During installation of the LED module it is absolutely necessary to use ESD protection. Luminaire design should protect the module from ESD. Installation of the LED module should be done by qualified person.
5. Lenses, diodes and other components on the module must be protected against mechanical damage and exposure to liquids and dirt.
6. The modules shouldn't have contact with hazardous and corrosive substances or aromatic organic compounds such as toluene, acetone, xylene, benzene.
7. For installation of modules use substances recommended and tested by the CREE LED®. List of substances available on the manufacturer's website: [cree-led.com](http://www.cree-led.com)

**Niviss is not responsible for any damage or failure due to not comply with above rules.
Otherwise, the complaint will not be taken into account.**

➤ **ENVIRONMENTAL CAUTION**



Caution!

It is prohibited to dispose of obsolete and waste electrical and electronic equipment together with regular household wastes. They should be properly sorted and recycled. Old electrical and electronic equipment should be returned to a waste collection point established by a waste-management service. Waste electrical and electronic equipment can be broken down to base materials and then recycled. For more information regarding waste management please contact your local authorities, waste-management service or the seller of electrical and electronic devices.

➤ **DATA DOWNLOAD**



[3D PDF FILE](#)

[STEP FILE](#)

[EU DECLARATION OF CONFORMITY \(CE\)](#)