

LED Modules 1119x26mm LEDIL LIANNA family are LED module based on the CREE LED<sup>®</sup> J Series<sup>®</sup> 2835 G class and J class optimized for cost effective and high efficacy applications and for LEDIL's LIANNA 2R optics. LED Modules 1119x26mm LEDIL LIANNA family are providing optimized and easy integration, with excellent quality, reliability and precision.

- High efficacy **219 lm/W** and up to **32860 lm**.
- LM-80 lifetime projections (IEC 62717) **> 100,000 (L70)<sup>1</sup>**
- Quick and effective heat dissipation due to the using MCPCB 1.0 mm with thermal conductivity 2.2 W/mK, or standard FR4 1.6mm, Lead Free HASL.
- EPREL registered product.
- Available CCT 2700K, 3000K, 4000K, 5700K, 6500K.
- Available CRI 80 or 90.



➤ **SPECIFICATION**

LED FAMILY	JB 2835 SERIES				
	2700K 3-STEP	3000K 3-STEP	4000K 3-STEP	5700K 3-STEP	6500K 3-STEP
CCT/SDCM					
Viewing Angle	120°				
Nominal Module Lumen Output <sup>2</sup>	G class CRI 80				
	4024lm	4176 lm	4440 lm	4440 lm	4428 lm
	G class CRI 90				
	3416 lm	3568 lm	3820 lm	3820 lm	3804 lm
	J class CRI 80				
	3884 lm	4036 lm	4300 lm	4300 lm	4300 lm
Nominal Efficacy <sup>2</sup>	J class CRI 90				
	3288 lm	3440 lm	3676 lm	3676 lm	3676 lm
	G class CRI 80				
	198 lm/W	206 lm/W	219 lm/W	219 lm/W	218 lm/W
	G class CRI 90				
	168 lm/W	176 lm/W	188 lm/W	188 lm/W	187 lm/W
CRI	J class CRI 80				
	185 lm/W	192 lm/W	205 lm/W	205 lm/W	205 lm/W
	J class CRI 90				
157 lm/W	164 lm/W	175 lm/W	175 lm/W	175 lm/W	
Nominal Driving Current	110 mA				
Voltage DC (typ.) <sup>2</sup>	96 V				
Power Consumption <sup>2</sup>	21.2 W				
Max. LED module working current <sup>3</sup>	0.96 A / module				
Voltage DC (max) <sup>3</sup>	113.4 V				
Max power <sup>3</sup>	217 W				
Max. LED module lumen output <sup>3</sup>	G class CRI 80				
	29789	30915	32860	32860	32758
	G class CRI 90				
	25285	26411	28254	28254	28151
	J class CRI 80				
	28164	29270	31181	31181	31181
Number of LEDs	J class CRI 90				
	23838	24945	26655	26655	26655
	144				
Power Supply Type	Constant Current				
Risk Group Classification <sup>4</sup>	RG-1 Low Risk for 2700K, 3000K, 4000K; RG-2 Moderate Risk for 5700K/6500K when above 262 mA per LED				
Energy Class	G class CRI 80				
	B	B	A	A	A
	G class CRI 90				
	C	C	C	C	C
	J class CRI 80				
	B	B	B	B	B
Operating Temperature	J class CRI 90				
	D	C	C	C	C
	-30°C + +60°C				
Tc max.	85°C				
Lifetime <sup>1</sup> /Tc life	>102 000 h @ 85°C/105 °C, 240 mA,				

<sup>1</sup> Lifetime of LEDs as declared by the manufacturer [CREE LED®](#) according to [IES LM-80-2015 Testing Results Revision:32 :2025](#).

<sup>2</sup> Source performance in real-life conditions at Tc=55°C, 110 mA without heatsink.

<sup>3</sup> External heatsink required.

<sup>4</sup> According to [Eye safety Cree document](#)

➤ **FEATURES**



**Application:**

- ❖ Task lighting
- ❖ Accent lighting
- ❖ Decorative lighting


**Features:**

- ❖ The module is dimmable by current set (0-100%)
- ❖ Long Lifetime
- ❖ Energy Saving


**EPREL Database link**

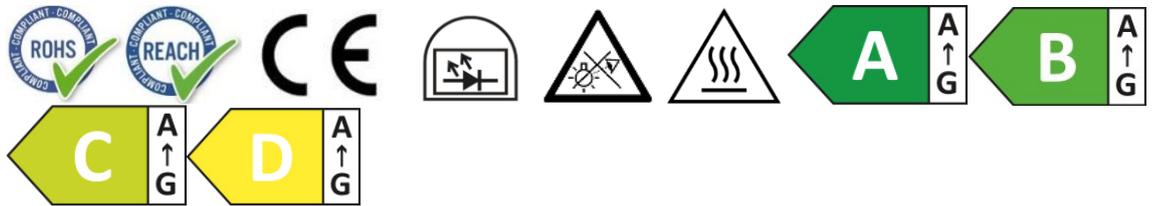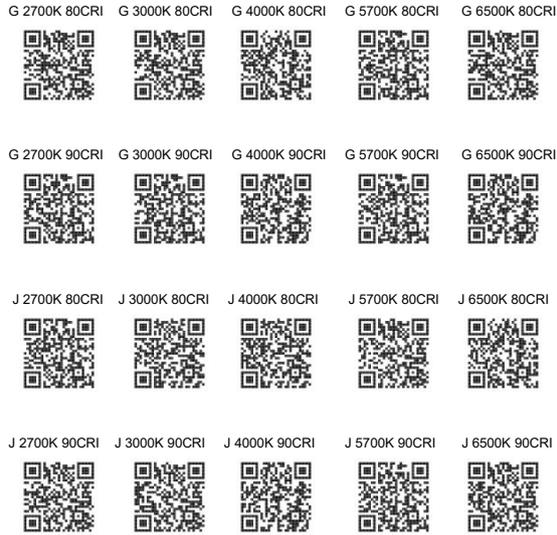


➤ **TYPICAL SPATIAL DISTRIBUTION**

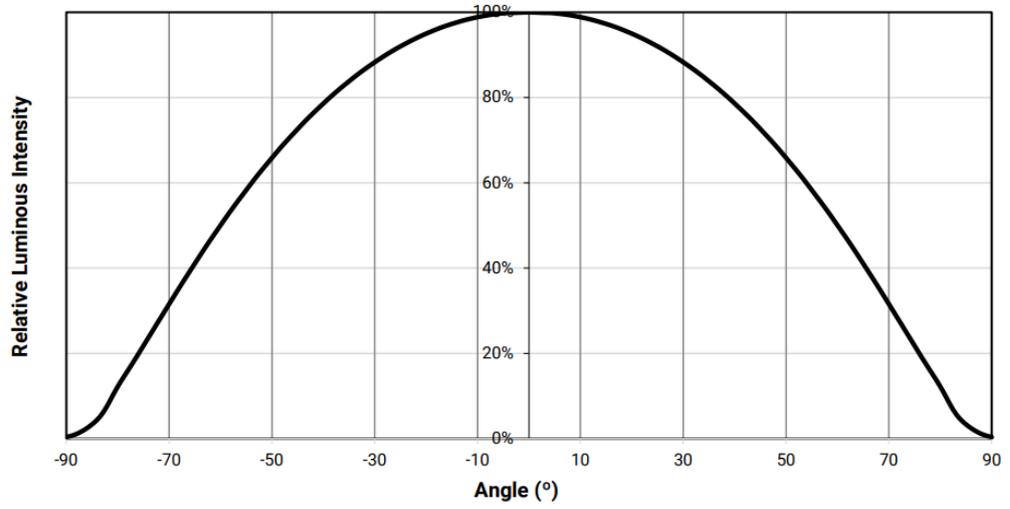


➤ **RELATIVE LUMINOUS FLUX VS. FORWARD CURRENT (mA) J class**

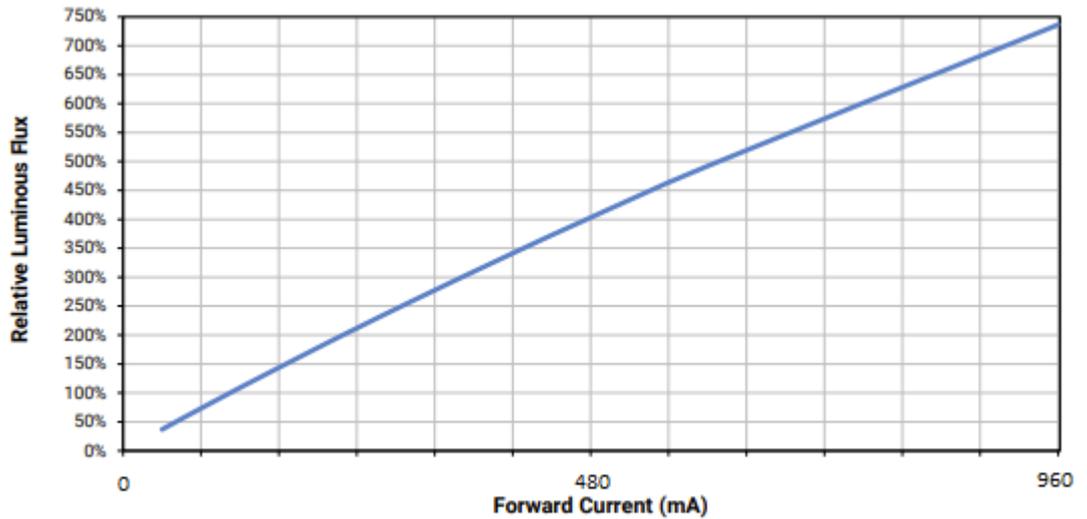


➤ **LUMINOUS EFFICACY (lm/W) VS. MODULE LED POWER (W) G class**

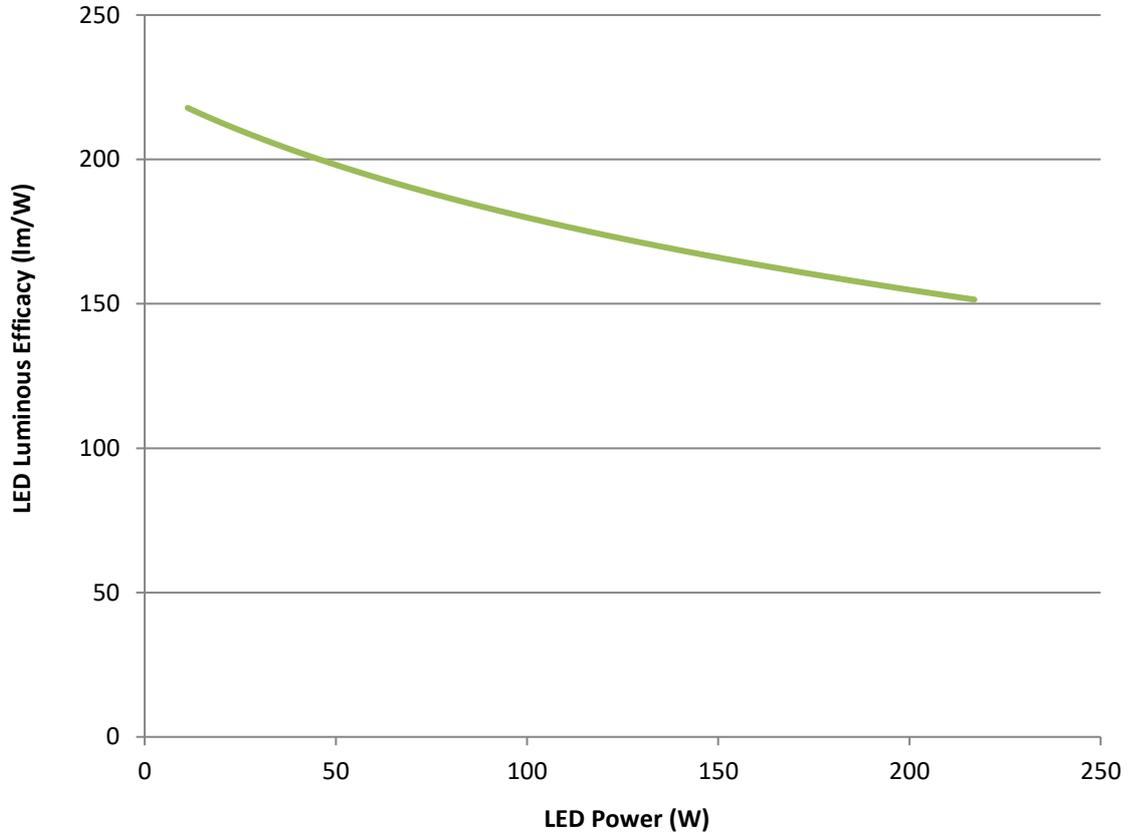


➤ **LUMINOUS FLUX VS. JUNCTION TEMPERATURE**

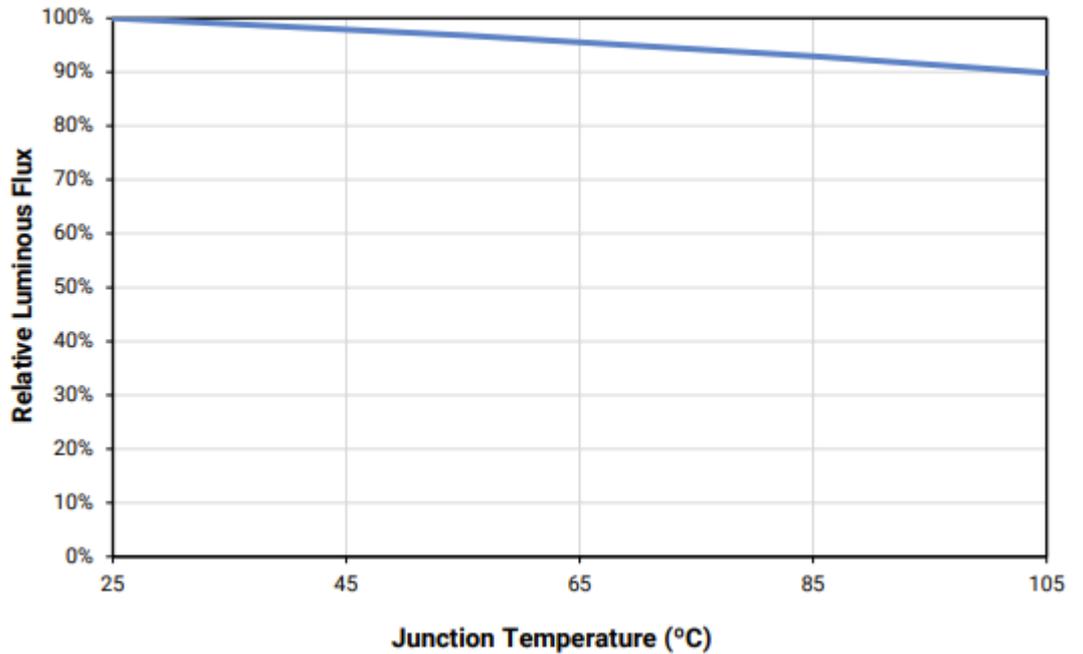


➤ **RELATIVE CHROMATICITY VS. TEMPERATURE**

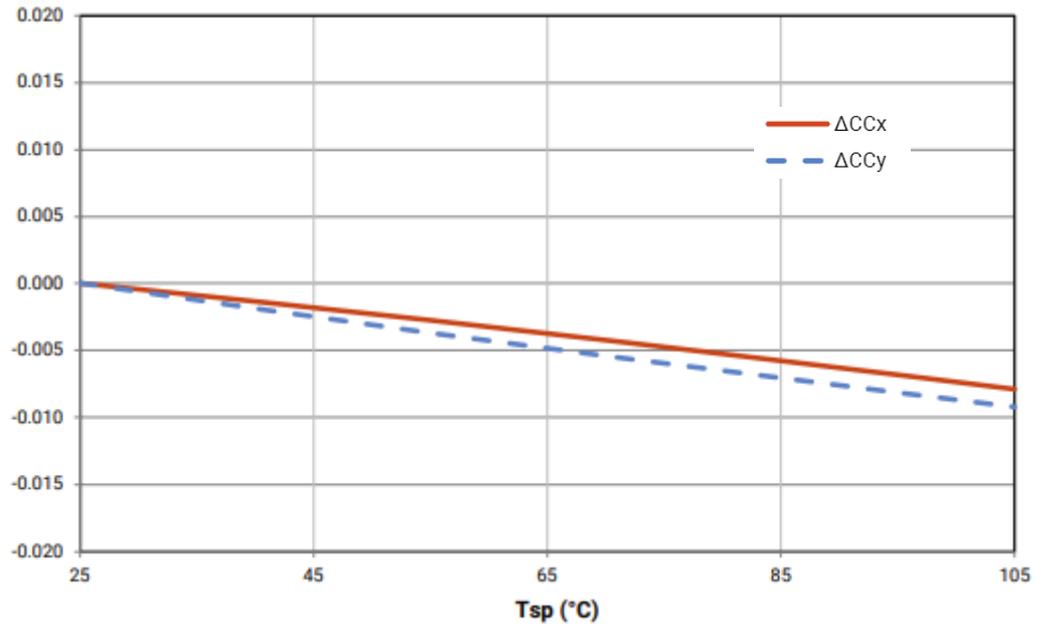

➤ **RELATIVE CHROMATICITY VS. CURRENT**

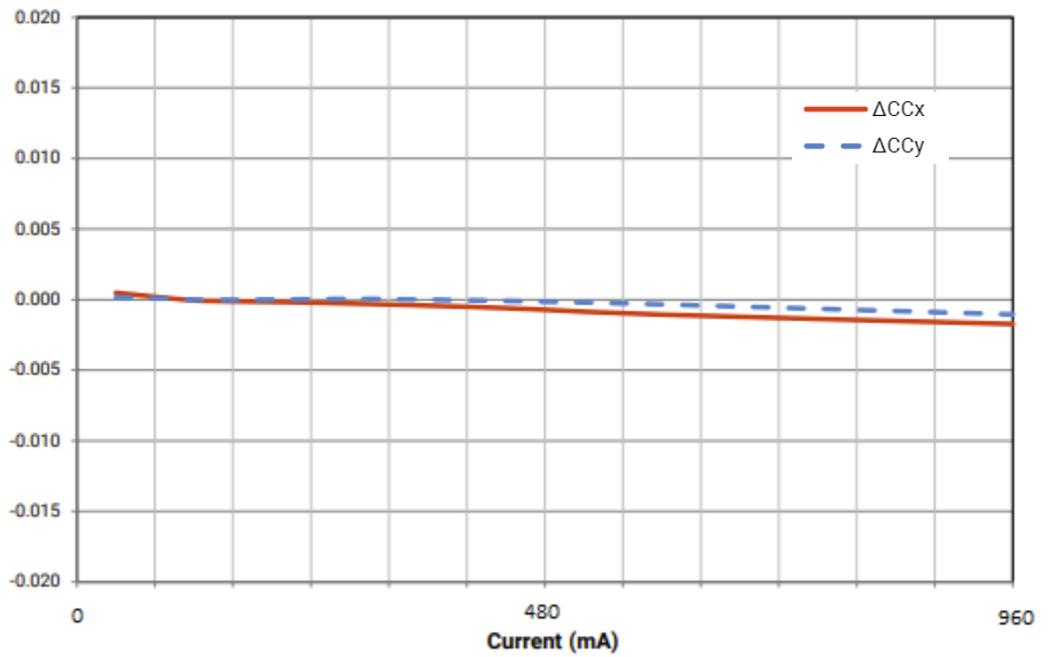


➤ **DIMENSIONS**

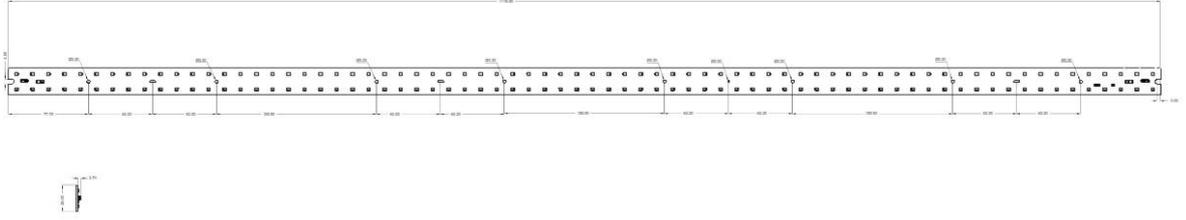


Notes:  
Drawing is not to scale.  
All dimensions are in millimeters.

MECHANICAL SPECIFICATION		
Dimensions	1119 x 26 mm	
Board Thickness	1.0 mm	1.6 mm
Board Material	MCPCB, 5052 Alloy, 2.2W/(m²K); high reflectivity white soldermask	FR4; high reflectivity white soldermask
Shape	Rectangular	

➤ **CONNECTION**

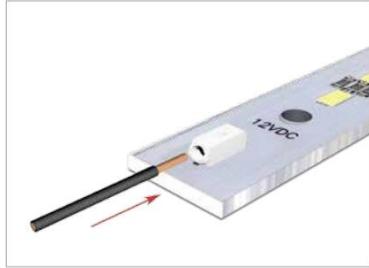


Inserting solid conductors via push-in termination.

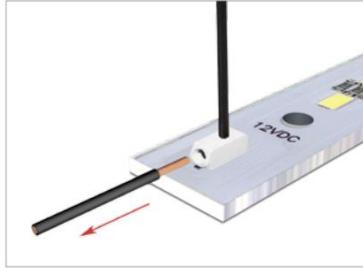


Easy conductor removal, e.g., via 206-859 operating tool.



➤ **ELECTRICAL SCHEMA**

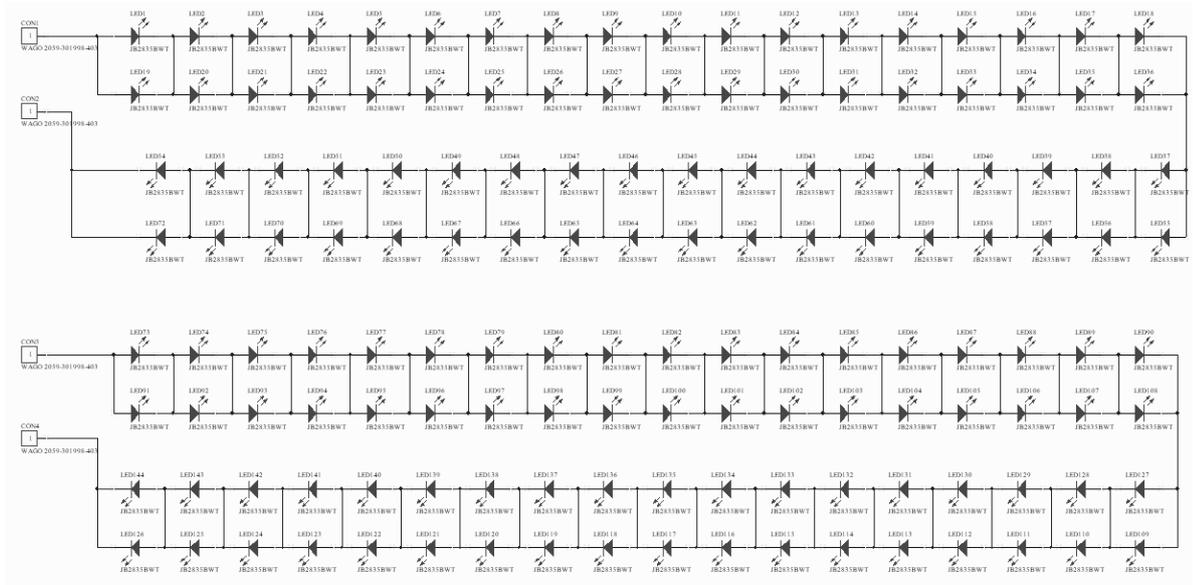

➤ **ELECTRICAL  
INSTALLATION**

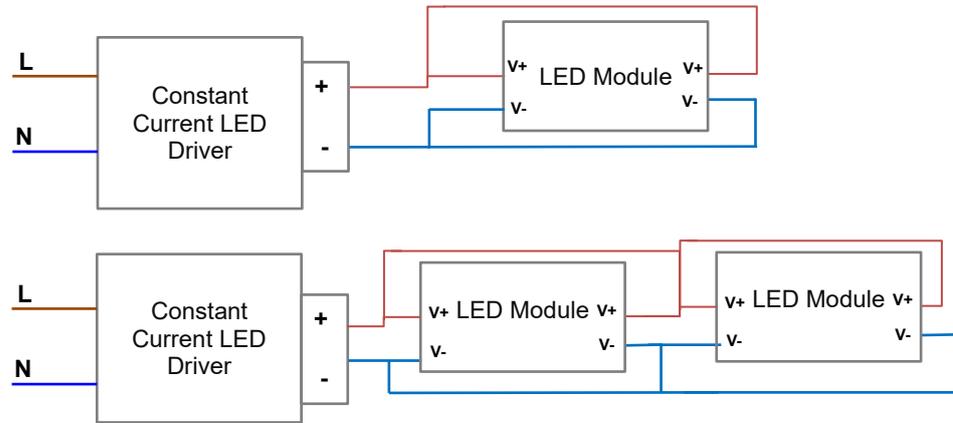



➤ **COMMERCIAL INFORMATION**

COMMERCIAL INFORMATION	
Connector	<a href="#">WAGO 2059</a>
Available Lenses	<a href="#">LEDIL LIANNA-2R-30</a> <a href="#">LEDIL LIANNA-2R-60</a> <a href="#">LEDIL LIANNA-2R-90</a>
Minimum Order Quantity	10 pcs.
Warranty	2 years
Power Supply	<a href="#">APC-35-350</a> <a href="#">ELG-150-C1050B</a> <a href="#">ELG-100-C700B</a> <a href="#">ELG-75-C500B</a> <a href="#">FMS-60-350-N-SELV-LD</a> <a href="#">HLG-320H-C2100A</a> <a href="#">HLG-240H-C1750A</a>

➤ **GENERAL TERMS OF USE**

1. The range of acceptable input voltages must include the expected voltage dropout across the LED string check on CREE LED [Website J Series® 2835](#)
2. Connecting to the power supply should be done when the power supply is off.
3. Modules should be connected to heatsink to dissipate heat from LED module. Temperature on the module shouldn't be higher than recommended by Cree®. Due to power of the module, appropriate heatsink should be used with thermal conductive tape or paste. The lower temperature on LED module causes longer lifetime.
4. During installation of the LED module it is absolutely necessary to use ESD protection. Luminaire design should protect the module from ESD. Installation of the LED module should be done by qualified person.
5. Lenses, diodes and other components on the module must be protected against mechanical damage and exposure to liquids and dirt.
6. The modules shouldn't have contact with hazardous and corrosive substances or aromatic organic compounds such as toluene, acetone, xylene, benzene.
7. For installation of modules use substances recommended and tested by the CREE LED®. List of substances available on the manufacturer's website: [cree-led.com](#)

**Niviss is not responsible for any damage or failure due to not comply with above rules.**

**Otherwise, the complaint will not be taken into account.**

➤ **ENVIRONMENTAL CAUTION**



**Caution!**

It is prohibited to dispose of obsolete and waste electrical and electronic equipment together with regular household wastes. They should be properly sorted and recycled. Old electrical and electronic equipment should be returned to a waste collection point established by a waste-management service. Waste electrical and electronic equipment can be broken down to base materials and then recycled. For more information regarding waste management please contact your local authorities, waste-management service or the seller of electrical and electronic devices.

➤ **DATA DOWNLOAD**

- [3D PDF FILE](#)
- [STEP FILE](#)
- [EU DECLARATION OF CONFORMITY \(CE\)](#)