

LED Modules MOD-28R280x20mm are constant current LED module based on the CREE LED[®] J Series[®] 2835 optimized for cost effective and high efficacy. LED Modules MOD-28R280x20mm are providing optimized and easy integration by two connectors for series system, with excellent quality, reliability and precision, low nominal power

- High efficacy **188 lm/W** and up to **6063 lm**.
- LM-80 lifetime projections (IEC 62717) **> 100,000 (L70)¹**
- Quick and effective heat dissipation due to the using MCPCB 1.0mm or standard FR-4 1.0mm, Lead Free HASL.
- EPREL registered product.
- Available CCT 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.
- Available CRI 80 or 90.



➤ **SPECIFICATION**

LED FAMILY	MOD-28R280x20mm JB2835 SERIES						
CCT/SDCM	2700K 3-STEP	3000K 3-STEP	3500K 3-STEP	4000K 3-STEP	5000K 3-STEP	5700K 3-STEP	6500K 3-STEP
Viewing Angle	120°						
Nominal Module Lumen Output ²	J class CRI 80						
	1845 lm	1917 lm	1983 lm	2043 lm	2043 lm	2043 lm	2043 lm
	J class CRI 90						
	1562 lm	1634 lm	1687 lm	1746 lm	1746 lm	1746 lm	1746 lm
Nominal Efficacy ²	J class CRI 80						
	170 lm/W	176 lm/W	182 lm/W	188 lm/W	188 lm/W	188 lm/W	188 lm/W
	J class CRI 90						
	144 lm/W	150 lm/W	155 lm/W	160 lm/W	160 lm/W	160 lm/W	160 lm/W
CRI	80; 90						
Nominal Driving Current	280 mA						
Voltage DC (typ.) ²	42 V						
Power Consumption ²	10.9 W						
Max. LED module working current³	960 mA / module						
Voltage DC (max) ³	44.2 V						
Max power³	42.3 W						
Max. LED module lumen output³	J class CRI 80						
	5476	5691	5887	6063	6063	6063	6063
	J class CRI 90						
	4635	4850	5007	5183	5183	5183	5183
Number of LEDs	28						
Power Supply Type	Constant Current						
Risk Group Classification ⁴	RG-1 Low Risk for 2700K, 3000K, 3500K, 4000K; RG-2 Moderate Risk for 5000K, 5700K, 6500K when above 262 mA per LED						
Energy Class	J class CRI 80						
	C	C	C	B	B	B	B
	J class CRI 90						
	D	D	D	D	D	D	D
Operating Temperature	-30°C + +60°C						
Tc max.	85°C						
Lifetime ¹ /Tc life	>102 000 h @ 85°C/105 °C, 240 mA,						

¹ Lifetime of LEDs as declared by the manufacturer [CREE LED®](#) according to [IES LM-80-2015 Testing Results Revision:32 :2025](#).
² Source performance in real-life conditions at Tc=55°C, 280 mA without heatsink.
³ External heatsink required.
⁴ According to [Eye safety Cree document](#)

➤ **FEATURES**

Application:

- ❖ Recessed furniture LED spotlight
- ❖ Decorative lighting
- ❖ Accent lighting

- ❖ General lighting
- ❖ Task lighting

Features:

- ❖ The module is dimmable by current set (0-100%)
- ❖ Long Lifetime
- ❖ Energy Saving

EPREL Database link

2700K 80CRI 3000K 80CRI 3500K 80CRI 4000K 80CRI




5000K 80CRI 5700K 80CRI 6500K 80CRI




2700K 90CRI 3000K 90CRI 3500K 90CRI 4000K 90CRI




5000K 90CRI 5700K 90CRI 6500K 90CRI

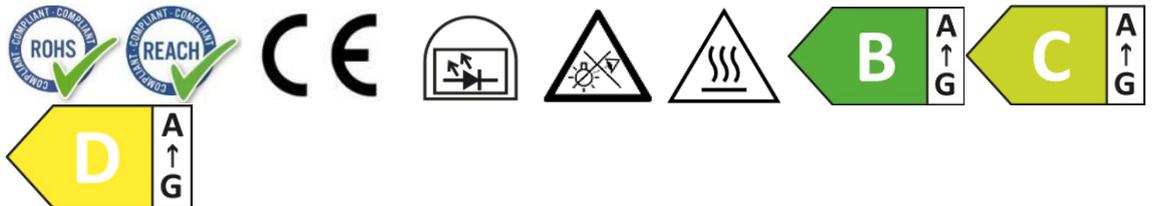


➤ **TYPICAL SPATIAL DISTRIBUTION**

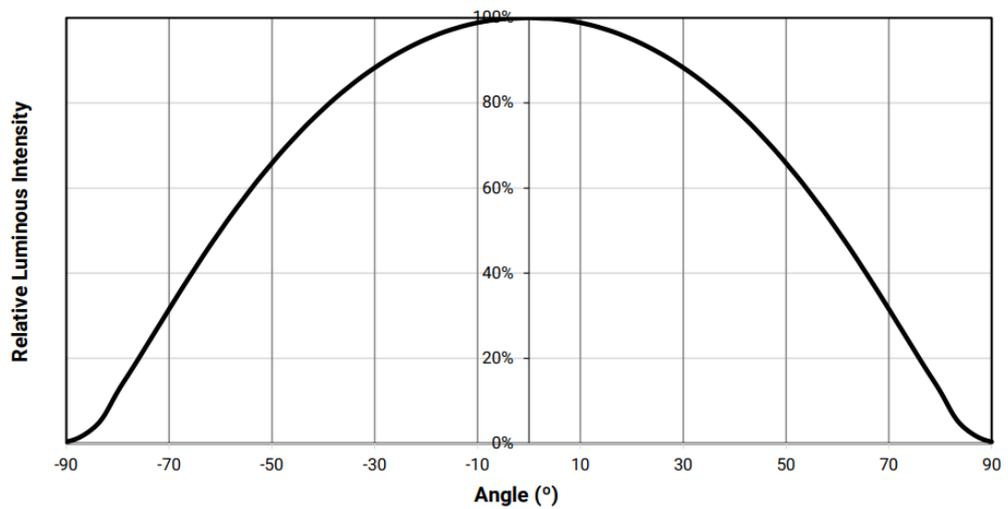


➤ **RELATIVE LUMINOUS FLUX VS. FORWARD CURRENT (mA)**

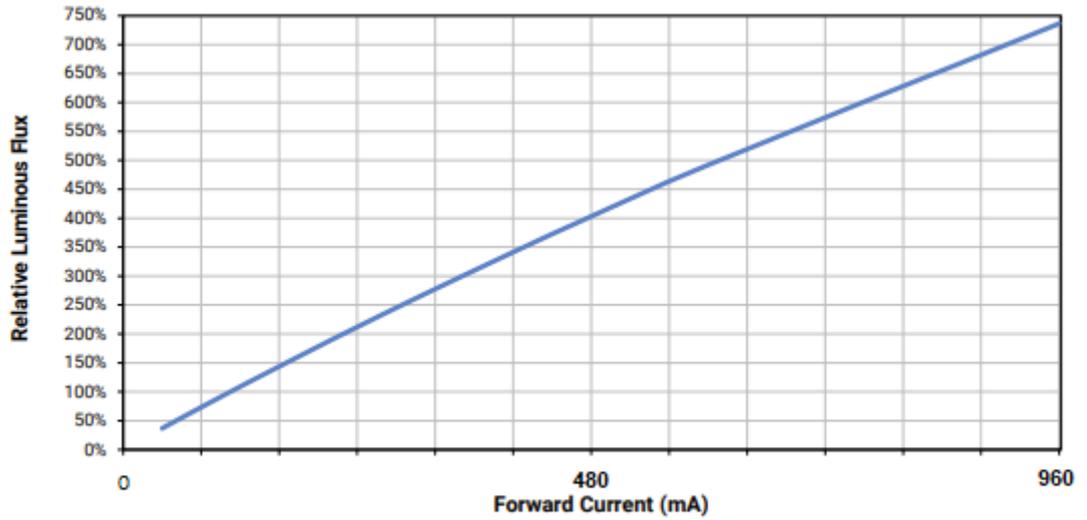


➤ **LUMINOUS FLUX (lm) VS. MODULE LED POWER (W)**

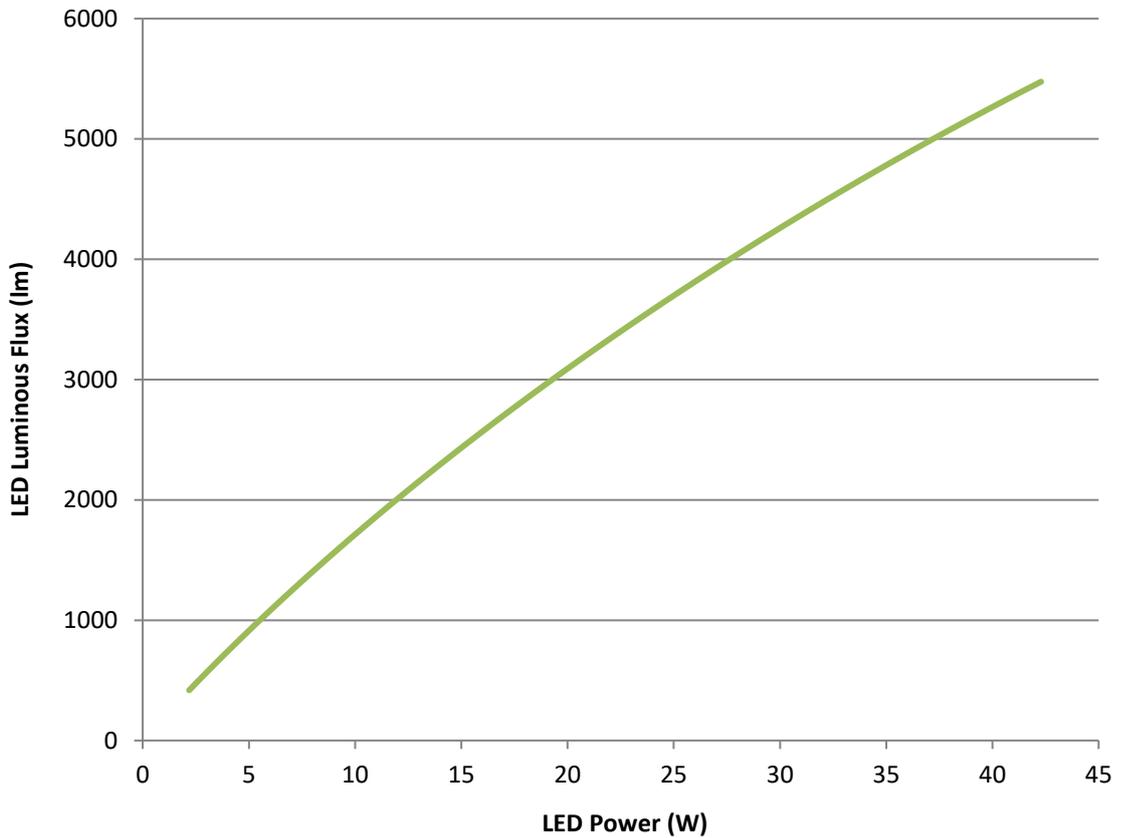


➤ LUMINOUS FLUX
VS.
JUNCTION
TEMPERATURE

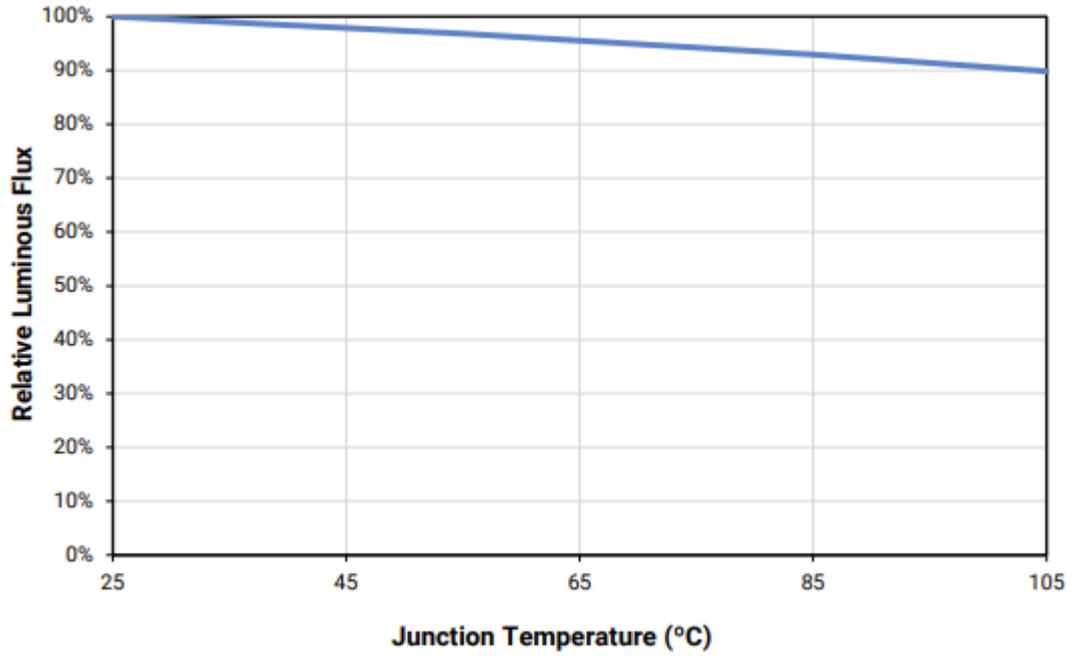


➤ RELATIVE
CHROMATICITY
VS.
TEMPERATURE

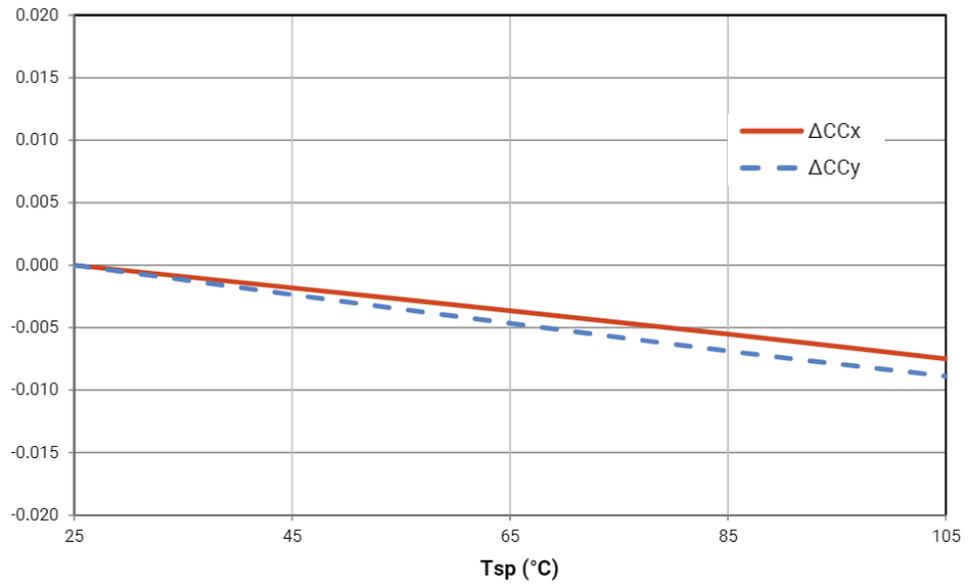

➤ **RELATIVE CHROMATICITY VS. CURRENT**

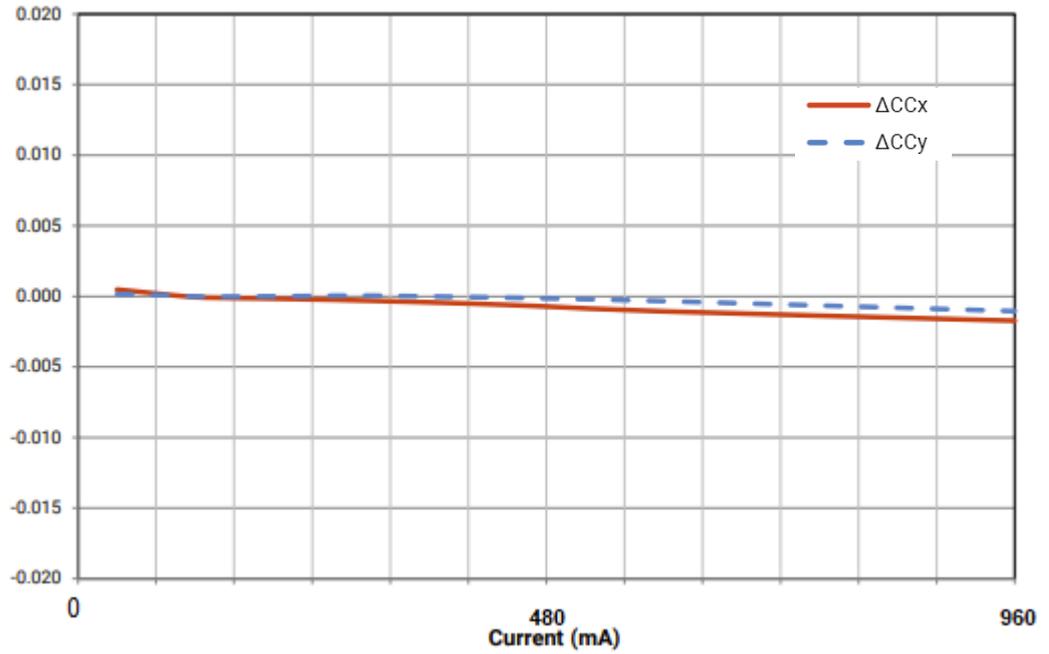

➤ **ELECTRICAL INSTALLATION**

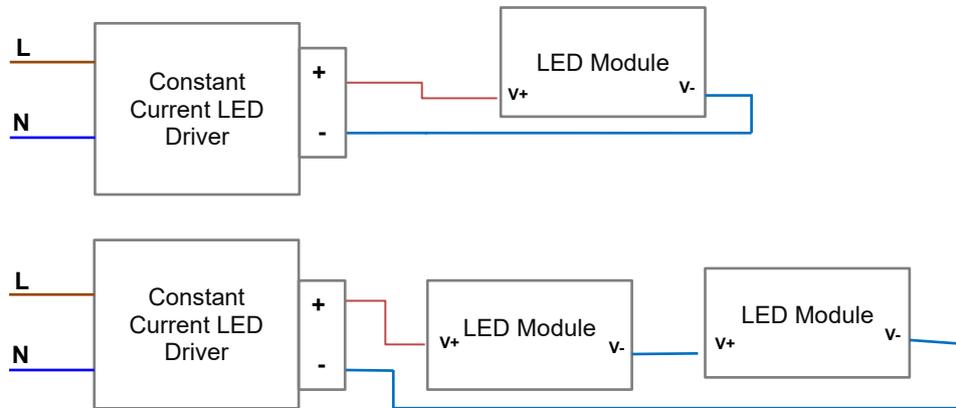

➤ **ORDERING CODE**

ORDERING CODE / ARTICLE CODE	DESCRIPTION
MOD-28R280x20-JB2835BJ-2780-2C-VA01	Led Module 1 feet 280x20mm 42V, High Efficacy, High Reflectivity White Soldermask, 28 LED, JB2835B class J, 2700K, CRI 80, 1.0 mm FR-4
MOD-28R280x20-JB2835BJ-3080-2C-VA01	Led Module 1 feet 280x20mm 42V, High Efficacy, High Reflectivity White Soldermask, 28 LED, JB2835B class J, 3000K, CRI 80, 1.0 mm FR-4
MOD-28R280x20-JB2835BJ-3580-2C-VA01	Led Module 1 feet 280x20mm 42V, High Efficacy, High Reflectivity White Soldermask, 28 LED, JB2835B class J, 3500K, CRI 80, 1.0 mm FR-4
MOD-28R280x20-JB2835BJ-4080-2C-VA01	Led Module 1 feet 280x20mm 42V, High Efficacy, High Reflectivity White Soldermask, 28 LED, JB2835B class J, 4000K, CRI 80, 1.0 mm FR-4
MOD-28R280x20-JB2835BJ-5080-2C-VA01	Led Module 1 feet 280x20mm 42V, High Efficacy, High Reflectivity White Soldermask, 28 LED, JB2835B class J, 5000K, CRI 80, 1.0 mm FR-4
MOD-28R280x20-JB2835BJ-5780-2C-VA01	Led Module 1 feet 280x20mm 24V, High Efficacy, High Reflectivity White Soldermask, 28 LED, JB2835B class J, 5700K, CRI 80, 1.0 mm FR-4
MOD-28R280x20-JB2835BJ-6580-2C-VA01	Led Module 1 feet 280x20mm 42V, High Efficacy, High Reflectivity White Soldermask, 28 LED, JB2835B class J, 6500K, CRI 80, 1.0 mm FR-4
MOD-28R280x20-JB2835BJ-2790-2C-VA01	Led Module 1 feet 280x20mm 42V, High Efficacy, High Reflectivity White Soldermask, 28 LED, JB2835B class J, 2700K, CRI 90, 1.0 mm FR-4
MOD-28R280x20-JB2835BJ-3090-2C-VA01	Led Module 1 feet 280x20mm 42V, High Efficacy, High Reflectivity White Soldermask, 28 LED, JB2835B class J, 3000K, CRI 90, 1.0 mm FR-4
MOD-28R280x20-JB2835BJ-3590-2C-VA01	Led Module 1 feet 280x20mm 42V, High Efficacy, High Reflectivity White Soldermask, 28 LED, JB2835B class J, 3500K, CRI 90, 1.0 mm FR-4
MOD-28R280x20-JB2835BJ-4090-2C-VA01	Led Module 1 feet 280x20mm 42V, High Efficacy, High Reflectivity White Soldermask, 28 LED, JB2835B class J, 4000K, CRI 90, 1.0 mm FR-4
MOD-28R280x20-JB2835BJ-5090-2C-VA01	Led Module 1 feet 280x20mm 42V, High Efficacy, High Reflectivity White Soldermask, 28 LED, JB2835B class J, 5000K, CRI 90, 1.0 mm FR-4
MOD-28R280x20-JB2835BJ-5790-2C-VA01	Led Module 1 feet 280x20mm 42V, High Efficacy, High Reflectivity White Soldermask, 28 LED, JB2835B class J, 5700K, CRI 90, 1.0 mm FR-4
MOD-28R280x20-JB2835BJ-6590-2C-VA01	Led Module 1 feet 280x20mm 42V, High Efficacy, High Reflectivity White Soldermask, 28 LED, JB2835B class J, 6500K, CRI 90, 1.0 mm FR-4

➤ **COMMERCIAL INFORMATION**

COMMERCIAL INFORMATION	
Connector	WAGO 2059
Available Lenses	LEDIL DAISY-MINI-14X1 DAISY-MINI-M DAISY-MINI-W DAISY-MINI-WW DAISY-MINI-M-D DAISY-MINI-W-D DAISY-MINI-WW-D DAISY-MINI-WWW-D DAISY-MINI-FT-D
Minimum Order Quantity	10 pcs.
Warranty	2 years
Power Supply	FLS-25-700DALI2-LA1 FAGLERISE PS-929002113206 LCM-25 MEAN-WELL LCM-25DA MEAN-WELL

➤ **GENERAL TERMS OF USE**

1. The range of acceptable input voltages must include the expected voltage dropout across the LED string check on CREE LED [Website J Series® 2835](#)
2. Connecting to the power supply should be done when the power supply is off.
3. Modules should be connected to heatsink to dissipate heat from LED module. Temperature on the module shouldn't be higher than recommended by Cree®. Due to power of the module, appropriate heatsink should be used with thermal conductive tape or paste. The lower temperature on LED module causes longer lifetime.
4. During installation of the LED module it is absolutely necessary to use ESD protection. Luminaire design should protect the module from ESD. Installation of the LED module should be done by qualified person.
5. Lenses, diodes and other components on the module must be protected against mechanical damage and exposure to liquids and dirt.
6. The modules shouldn't have contact with hazardous and corrosive substances or aromatic organic compounds such as toluene, acetone, xylene, benzene.
7. For installation of modules use substances recommended and tested by the CREE LED®. List of substances available on the manufacturer's website: [cree-led.com](#)

**Niviss is not responsible for any damage or failure due to not comply with above rules.
Otherwise, the complaint will not be taken into account.**

➤ **ENVIRONMENTAL CAUTION**



Caution!

It is prohibited to dispose of obsolete and waste electrical and electronic equipment together with regular household wastes. They should be properly sorted and recycled. Old electrical and electronic equipment should be returned to a waste collection point established by a waste-management service. Waste electrical and electronic equipment can be broken down to base materials and then recycled. For more information regarding waste management please contact your local authorities, waste-management service or the seller of electrical and electronic devices.

➤ **DATA DOWNLOAD**

- [3D PDF FILE](#)
- [STEP FILE](#)
- [EU DECLARATION OF CONFORMITY \(CE\)](#)