
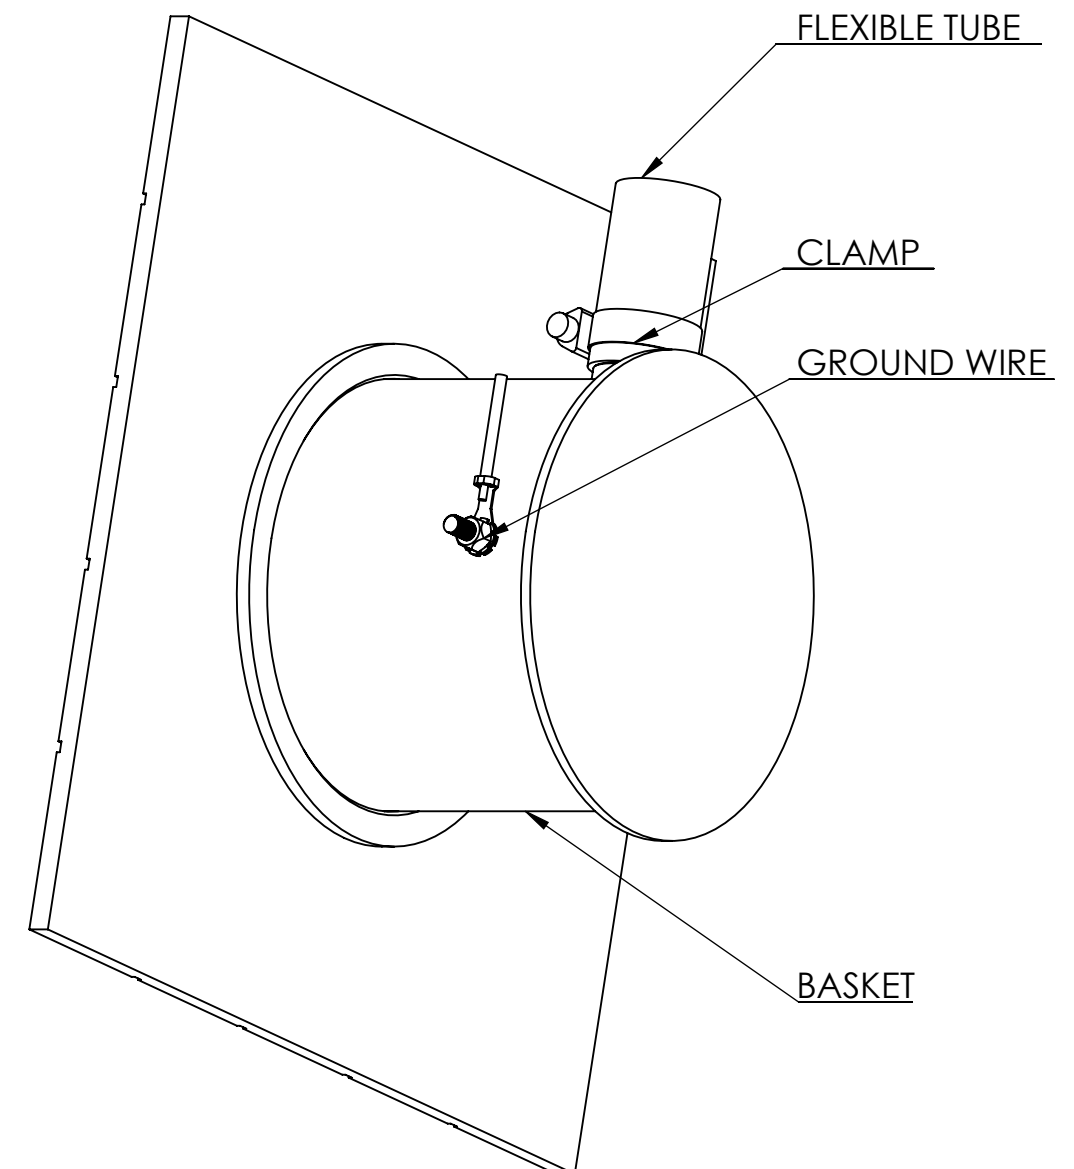
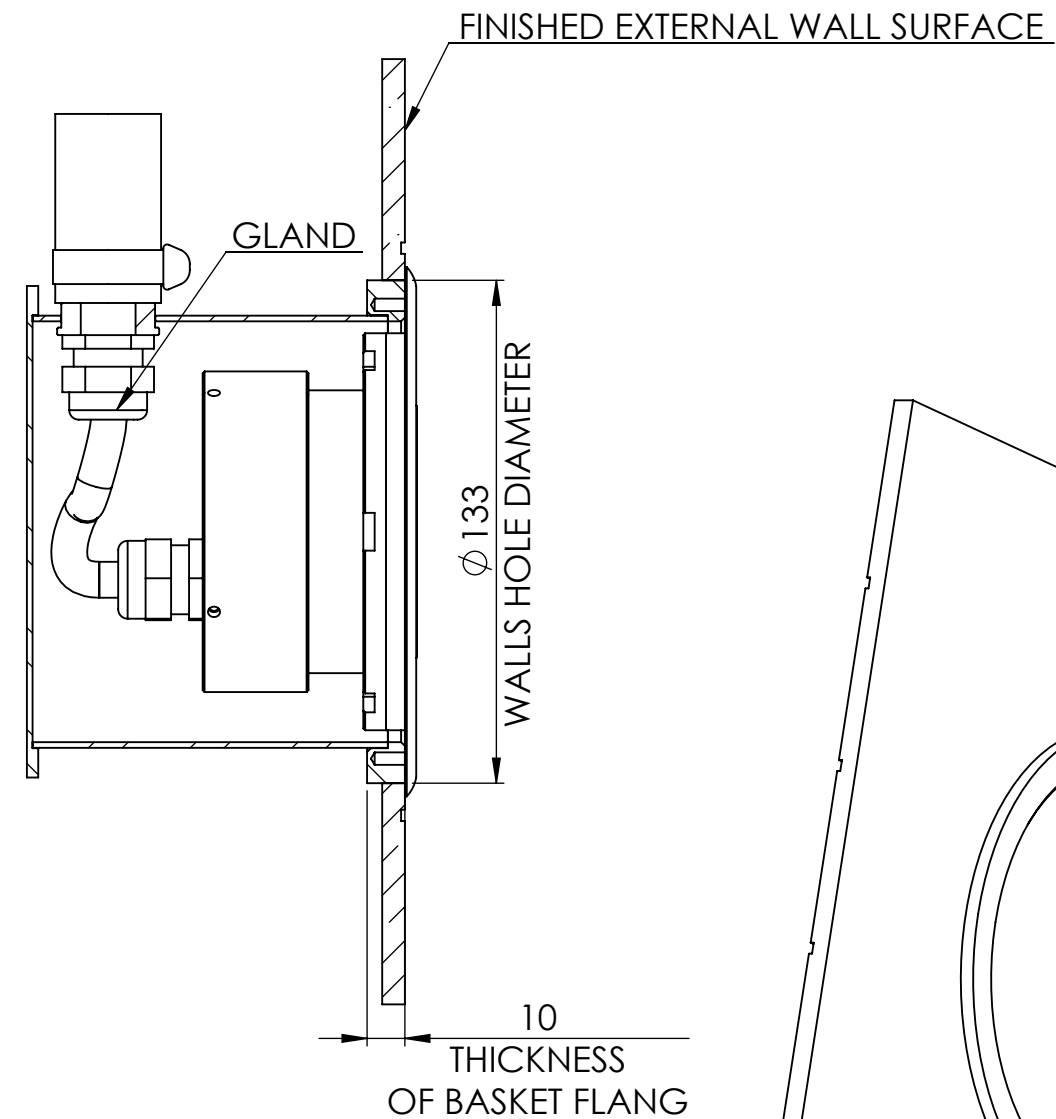


INSTALLATION MANUAL FOR STEEL AND CONCRETE SWIMMING POOL

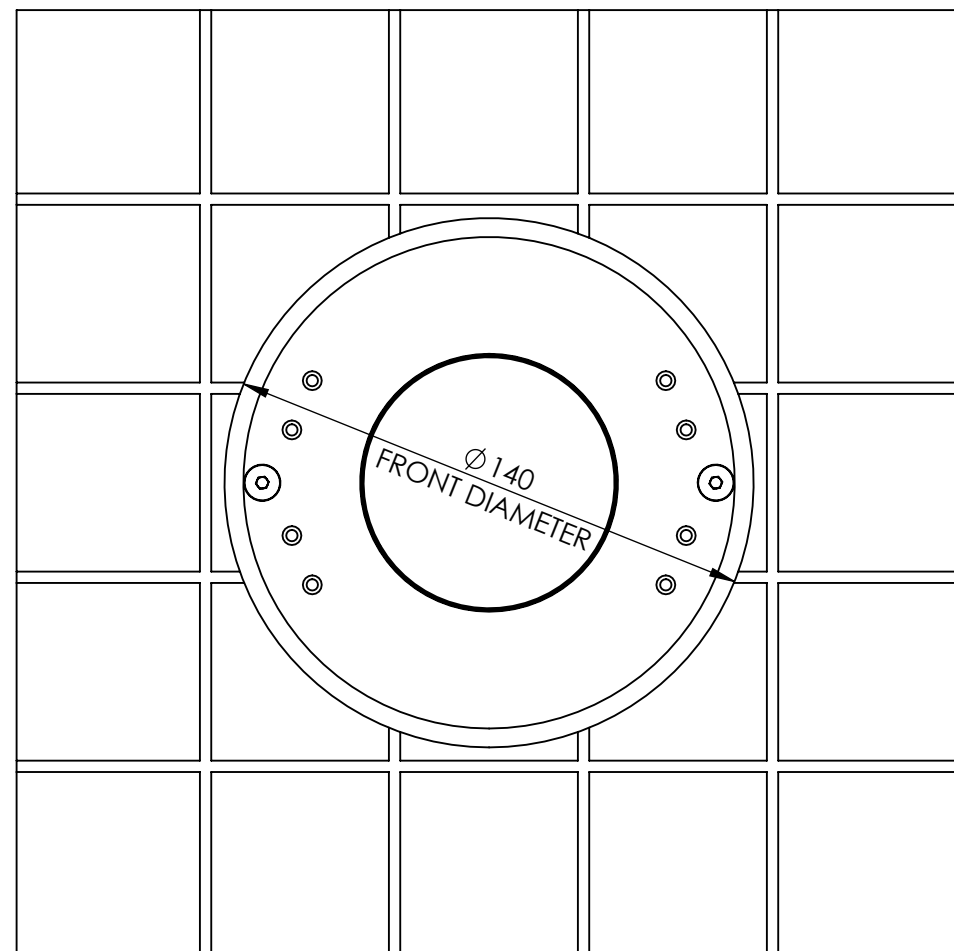

Mounting Requirement:

1. Ground wire and flexible tube with clam must be mounted before mounting basket in concret wall
2. Front of the basket must be in harmony with finishing external wall surface
3. After welding basket to steel wall, the weld must be pickling and passivation
4. Diameter of steel wall $\varnothing 133 (+1/-0)$
5. Diameter of lamps front $\varnothing 140$

Dimension type	[mm]
Front diameter	140
Mounting hole	133 (+1/-0)

All show design, picture and information are the intellectual property of Niviss®.

It's strickly forbidden to forward these information to a third party! All copyrights are belonging to Niviss®.