

LED Modules MOD-180R1400x20mm are constant current LED module based on the CREE LED[®] J Series[®] 2835 optimized for cost effective and high efficacy. LED Modules MOD-180R1400x20mm are providing optimized and easy integration by two connectors for series system plus reverse R-, with excellent quality, reliability and precision, low nominal power

- High efficacy **204 lm/W** and up to **38976 lm**.
- LM-80 lifetime projections (IEC 62717) **> 100,000 (L70)¹**
- Quick and effective heat dissipation due to the using MCPCB 1.0mm or standard FR-4 1.0mm, Lead Free HASL.
- EPREL registered product.
- Available CCT 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.
- Available CRI 80 or 90.



➤ **SPECIFICATION**

LED FAMILY		MOD-180R1400x20mm JB 2835 SERIES						
CCT/SDCM	2700K 3-STEP	3000K 3-STEP	3500K 3-STEP	4000K 3-STEP	5000K 3-STEP	5700K 3-STEP	6500K 3-STEP	
Viewing Angle	120°							
Nominal Module Lumen Output ²	J class CRI 80							
	5280 lm	5490 lm	5675 lm	5845 lm	5845 lm	5845 lm	5845 lm	
	J class CRI 90							
Nominal Efficacy ²	4470 lm	4675 lm	4830 lm	5000 lm	5000 lm	5000 lm	5000 lm	
	J class CRI 80							
	184 lm/W	191 lm/W	198 lm/W	204 lm/W	204 lm/W	204 lm/W	204 lm/W	
	J class CRI 90							
	156 lm/W	163 lm/W	168 lm/W	174 lm/W	174 lm/W	174 lm/W	174 lm/W	
CRI	80; 90							
Nominal Driving Current	180 mA							
Voltage DC (typ.) ²	180 V							
Power Consumption ²	28.7 W							
Max. LED module working current ³	1440 mA / module							
Voltage DC (max) ³	184 V							
Max power ³	272 W							
Max. LED module lumen output ³	J class CRI 80							
	35204	36587	37845	38976	38976	38976	38976	
	J class CRI 90							
	29798	31181	32187	33318	33318	33318	33318	
Number of LEDs	180							
Power Supply Type	Constant Current							
Risk Group Classification ⁴	RG-1 Low Risk for 2700K, 3000K, 3500K, 4000K; RG-2 Moderate Risk for 5000K, 5700K, 6500K when above 262 mA per LED							
Energy Class	J class CRI 80							
	B	B	B	B	B	B	B	
	J class CRI 90							
	D	C	C	C	C	C	C	
Operating Temperature	-30°C ÷ +60°C							
Tc max.	85°C							
Lifetime ¹ /Tc life	>102 000 h @ 85°C/105 °C, 240 mA,							

¹ Lifetime of LEDs as declared by the manufacturer [CREE LED®](#) according to [IES LM-80-2015 Testing Results Revision:32 :2025](#).

² Source performance in real-life conditions at Tc=55°C, 180 mA without heatsink.

³ External heatsink required.

⁴ According to [Eye safety Cree document](#)

➤ FEATURES

Application:

- ❖ Recessed furniture LED spotlight
- ❖ Decorative lighting
- ❖ Accent lighting

- ❖ General lighting
- ❖ Task lighting

Features:

- ❖ The module is dimmable by current set (0-100%)
- ❖ Long Lifetime
- ❖ Energy Saving

EPREL Database link

2700K 80CRI 3000K 80CRI 3500K 80CRI 4000K 80CRI




5000K 80CRI 5700K 80CRI 6500K 80CRI




2700K 90CRI 3000K 90CRI 3500K 90CRI 4000K 90CRI




5000K 90CRI 5700K 90CRI 6500K 90CRI

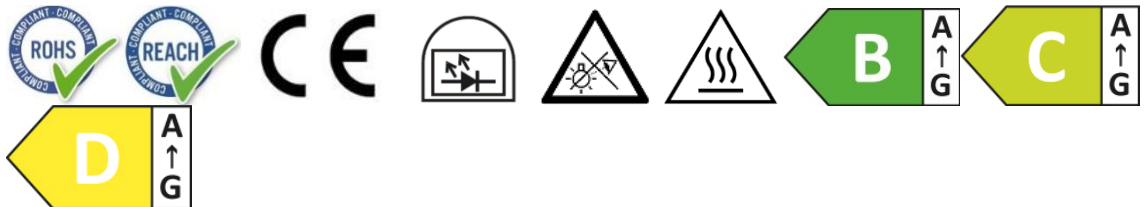


➤ TYPICAL SPATIAL DISTRIBUTION

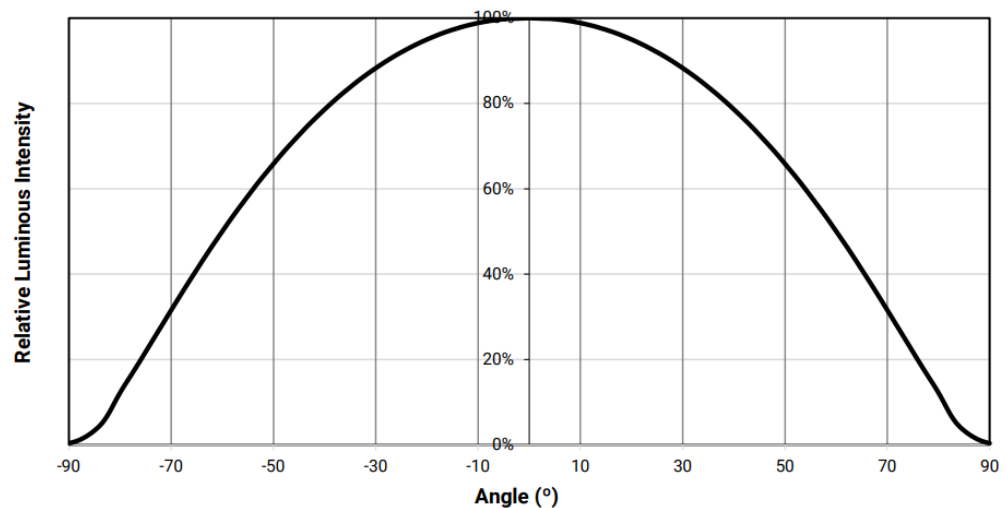


➤ **RELATIVE LUMINOUS FLUX VS. FORWARD CURRENT (mA)**

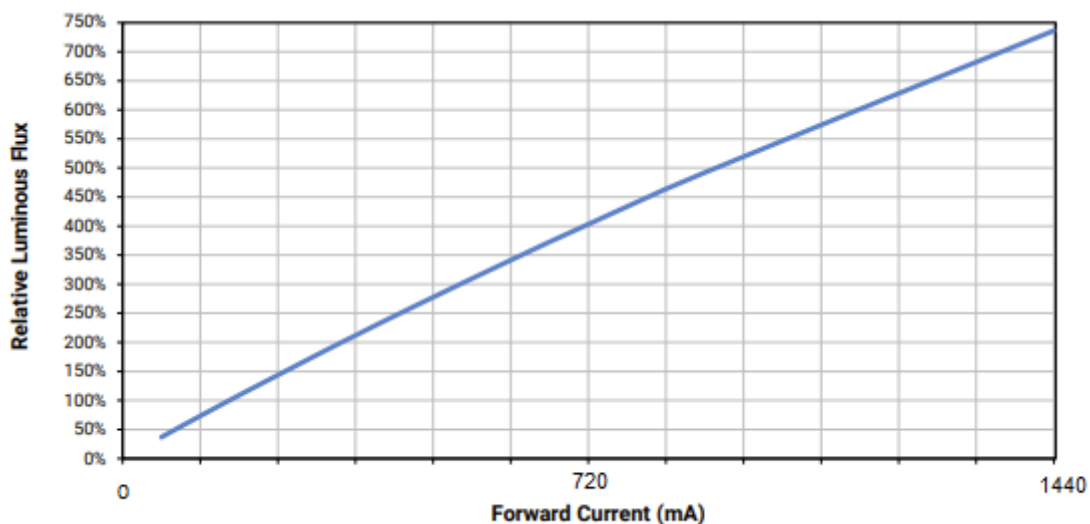


➤ **LUMINOUS EFFICACY (lm/W) VS. MODULE LED POWER (W)**

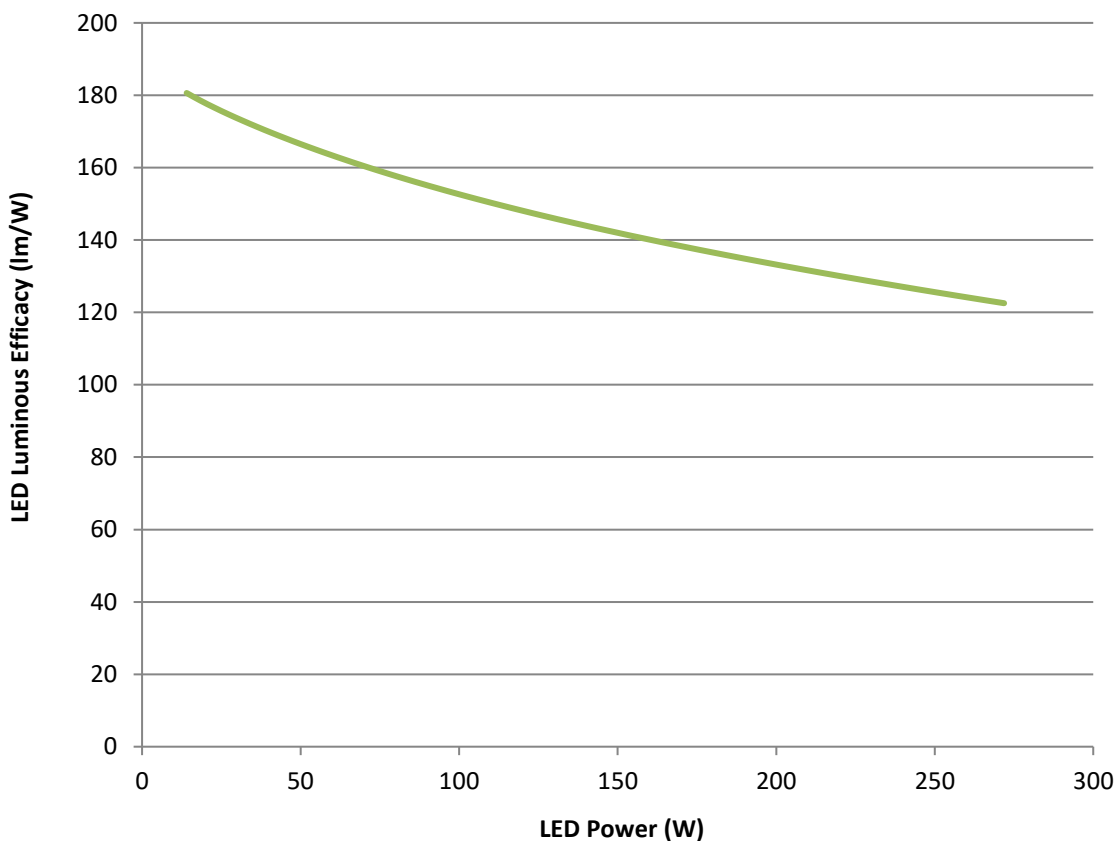


➤ **LUMINOUS FLUX
VS.
JUNCTION
TEMPERATURE**

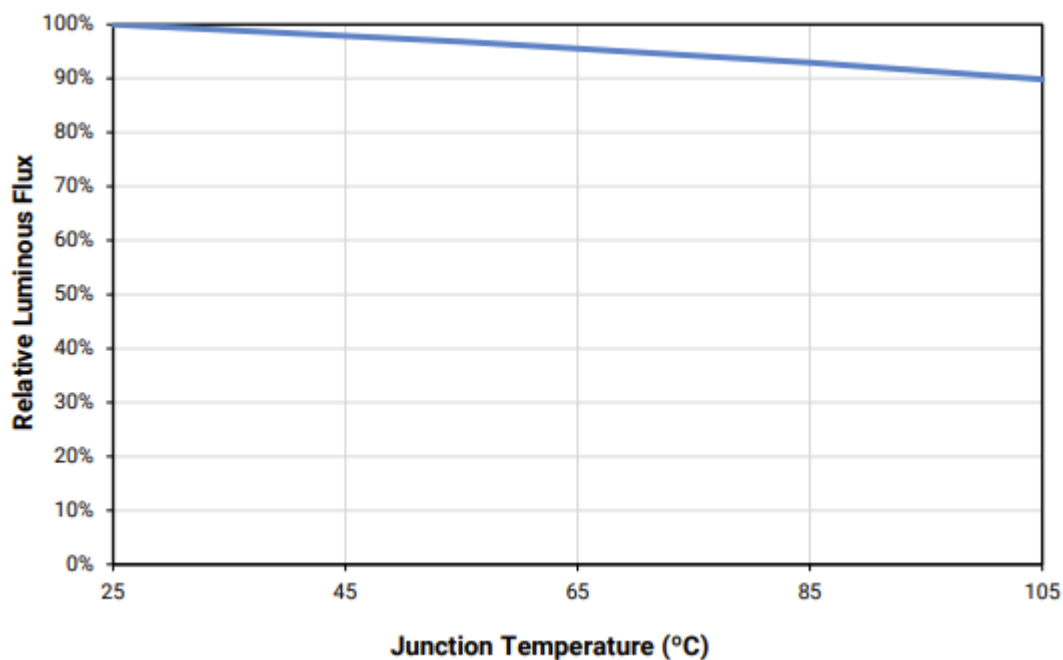


➤ **RELATIVE
CHROMATICITY
VS.
TEMPERATURE**

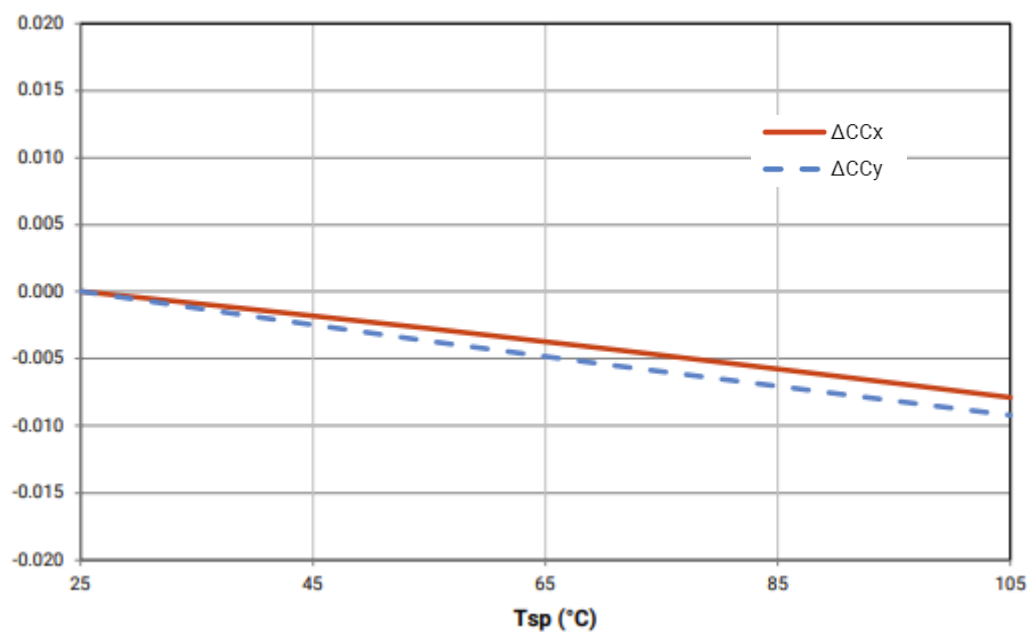

➤ **RELATIVE CHROMATICITY VS. CURRENT**

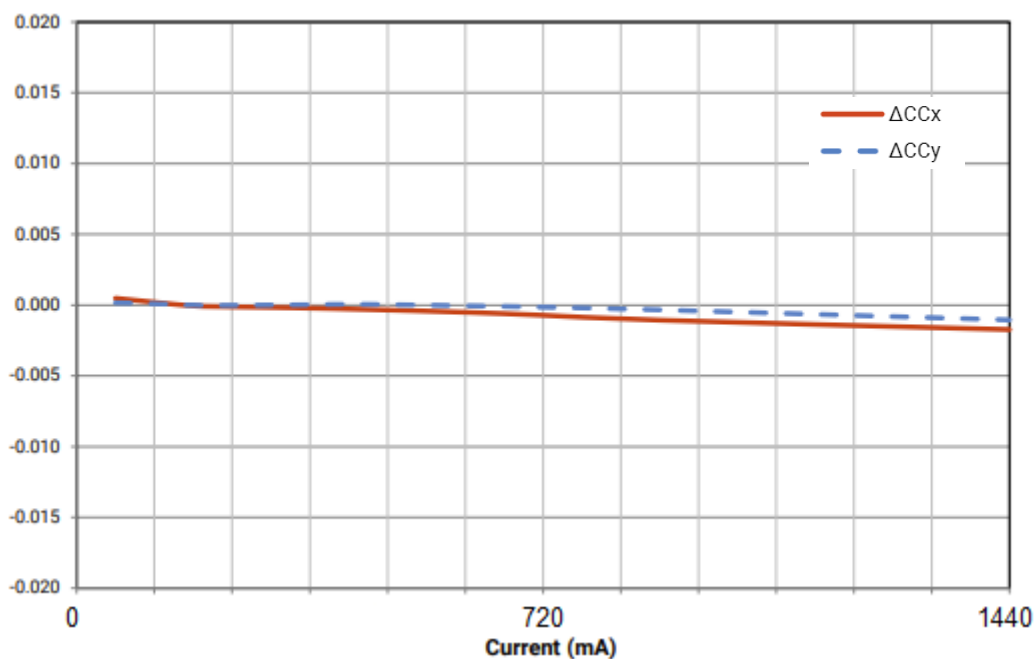


➤ **DIMENSIONS**




Notes:
Drawing is not to scale.
All dimensions are in millimeters.

MECHANICAL SPECIFICATION		
Dimensions	1399.6 x 20 mm	
Board Thickness	1.0 mm	1.0 mm
Board Material	MCPCB, 3003 Alloy, 1.3W/(m²K); high reflectivity white soldermask	FR-4, white soldermask
Shape	Rectangular	

➤ **CONNECTION**

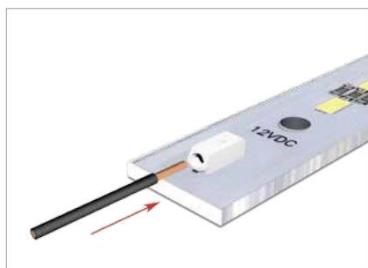


Inserting solid conductors via push-in termination.

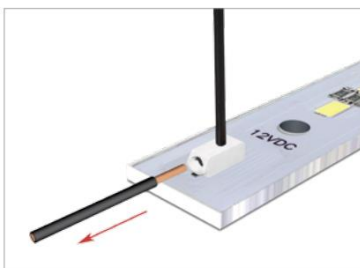


Easy conductor removal, e.g., via 206-859 operating tool.



➤ **ELECTRICAL
SCHEMA**

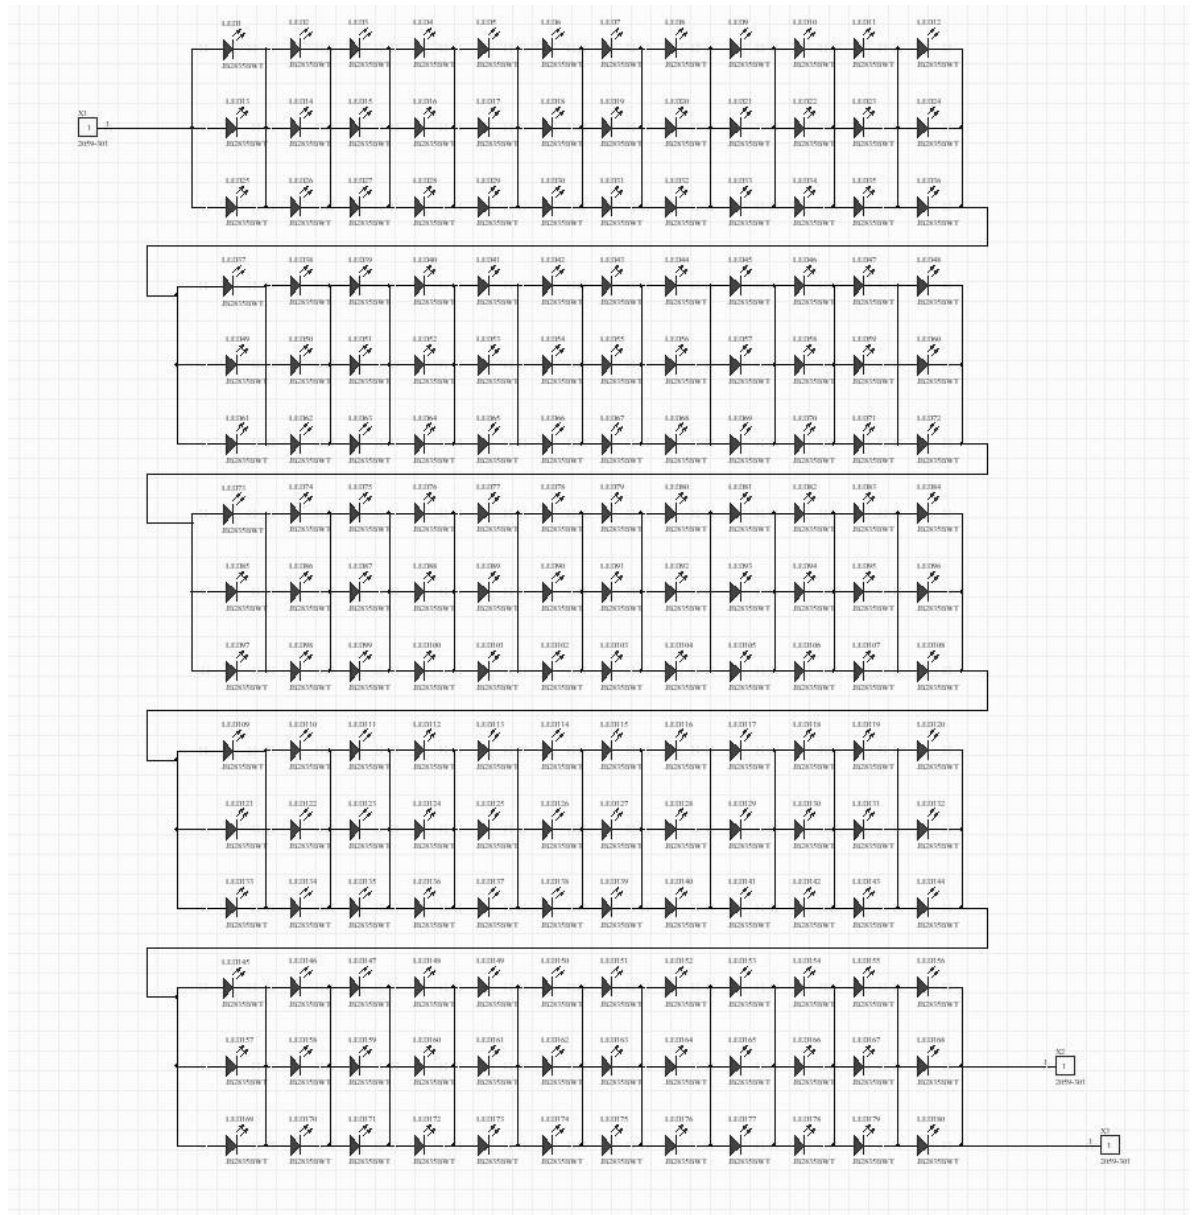

➤ **ELECTRICAL
INSTALLATION**

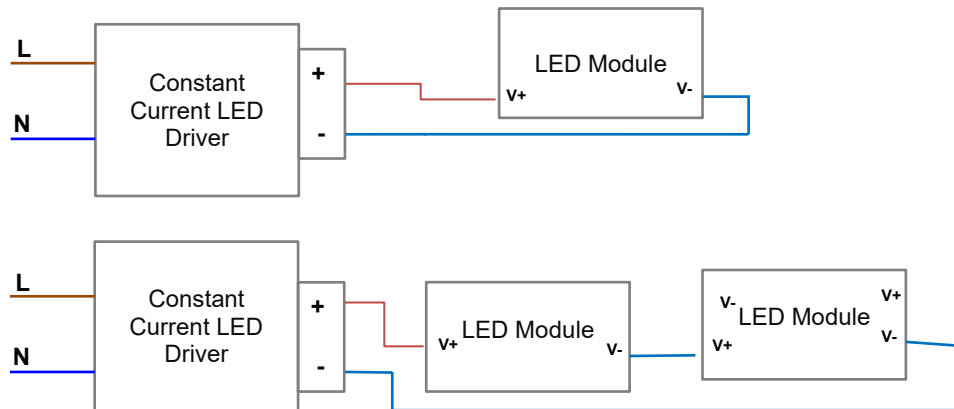

➤ **ORDERING CODE**

ORDERING CODE / ARTICLE CODE	DESCRIPTION
MOD-180R1400x20-JB2835BJ-2780-VA01	Linear Led Module 5 feet 1400x20mm 36V, High Efficacy, High Reflectivity White Soldermask, 180 LED, JB2835B class J, 2700K, CRI 80, 1.0 mm FR-4
MOD-180R1400x20-JB2835BJ-3080-VA01	Linear Led Module 5 feet 1400x20mm 36V, High Efficacy, High Reflectivity White Soldermask, 180 LED, JB2835B class J, 3000K, CRI 80, 1.0 mm FR-4
MOD-180R1400x20-JB2835BJ-3580-VA01	Linear Led Module 5 feet 1400x20mm 36V, High Efficacy, High Reflectivity White Soldermask, 180 LED, JB2835B class J, 3500K, CRI 80, 1.0 mm FR-4
MOD-180R1400x20-JB2835BJ-4080-VA01	Linear Led Module 5 feet 1400x20mm 36V, High Efficacy, High Reflectivity White Soldermask, 180 LED, JB2835B class J, 4000K, CRI 80, 1.0 mm FR-4
MOD-180R1400x20-JB2835BJ-5080-VA01	Linear Led Module 5 feet 1400x20mm 36V, High Efficacy, High Reflectivity White Soldermask, 180 LED, JB2835B class J, 5000K, CRI 80, 1.0 mm FR-4
MOD-180R1400x20-JB2835BJ-5780-VA01	Linear Led Module 5 feet 1400x20mm 36V, High Efficacy, High Reflectivity White Soldermask, 180 LED, JB2835B class J, 5700K, CRI 80, 1.0 mm FR-4
MOD-180R1400x20-JB2835BJ-6580-VA01	Linear Led Module 5 feet 1400x20mm 36V, High Efficacy, High Reflectivity White Soldermask, 180 LED, JB2835B class J, 6500K, CRI 80, 1.0 mm FR-4
MOD-180R1400x20-JB2835BJ-2790-VA01	Linear Led Module 5 feet 1400x20mm 36V, High Efficacy, High Reflectivity White Soldermask, 180 LED, JB2835B class J, 2700K, CRI 90, 1.0 mm FR-4
MOD-180R1400x20-JB2835BJ-3090-VA01	Linear Led Module 4 feet 1120x20mm 36V, High Efficacy, High Reflectivity White Soldermask, 180 LED, JB2835B class J, 3000K, CRI 90, 1.0 mm FR-4
MOD-180R1400x20-JB2835BJ-3590-VA01	Linear Led Module 5 feet 1400x20mm 36V, High Efficacy, High Reflectivity White Soldermask, 180 LED, JB2835B class J, 3500K, CRI 90, 1.0 mm FR-4
MOD-180R1400x20-JB2835BJ-4090-VA01	Linear Led Module 5 feet 1400x20mm 36V, High Efficacy, High Reflectivity White Soldermask, 180 LED, JB2835B class J, 4000K, CRI 90, 1.0 mm FR-4
MOD-180R1400x20-JB2835BJ-5090-VA01	Linear Led Module 5 feet 1400x20mm 36V, High Efficacy, High Reflectivity White Soldermask, 180 LED, JB2835B class J, 5000K, CRI 90, 1.0 mm FR-4
MOD-180R1400x20-JB2835BJ-5790-VA01	Linear Led Module 5 feet 1400x20mm 36V, High Efficacy, High Reflectivity White Soldermask, 180 LED, JB2835B class J, 5700K, CRI 90, 1.0 mm FR-4
MOD-180R1400x20-JB2835BJ-6590-VA01	Linear Led Module 5 feet 1400x20mm 36V, High Efficacy, High Reflectivity White Soldermask, 180 LED, JB2835B class J, 6500K, CRI 90, 1.0 mm FR-4

➤ **COMMERCIAL
INFORMATION**

COMMERCIAL INFORMATION	
Connector	<u>WAGO 2059</u>
Minimum Order Quantity	10 pcs.
Warranty	2 years
Power Supply	PS-929003464506 PS-ELG-75-C350B PS-929000702202

➤ **GENERAL TERMS OF USE**

1. The range of acceptable input voltages must include the expected voltage dropout across the LED string check on CREE LED [Website J Series® 2835](#)
2. Connecting to the power supply should be done when the power supply is off.
3. Modules should be connected to heatsink to dissipate heat from LED module. Temperature on the module shouldn't be higher than recommended by Cree®. Due to power of the module, appropriate heatsink should be used with thermal conductive tape or paste. The lower temperature on LED module causes longer lifetime.
4. During installation of the LED module it is absolutely necessary to use ESD protection. Luminaire design should protect the module from ESD. Installation of the LED module should be done by qualified person.
5. Lenses, diodes and other components on the module must be protected against mechanical damage and exposure to liquids and dirt.
6. The modules shouldn't have contact with hazardous and corrosive substances or aromatic organic compounds such as toluene, acetone, xylene, benzene.
7. For installation of modules use substances recommended and tested by the CREE LED®. List of substances available on the manufacturer's website: cree-led.com

Niviss is not responsible for any damage or failure due to not comply with above rules.

Otherwise, the complaint will not be taken into account.

➤ **ENVIRONMENTAL CAUTION**



Caution!

It is prohibited to dispose of obsolete and waste electrical and electronic equipment together with regular household wastes. They should be properly sorted and recycled. Old electrical and electronic equipment should be returned to a waste collection point established by a waste-management service. Waste electrical and electronic equipment can be broken down to base materials and then recycled. For more information regarding waste management please contact your local authorities, waste-management service or the seller of electrical and electronic devices.

➤ **DATA DOWNLOAD**

- [3D PDF FILE](#)
- [STEP FILE](#)
- [EU DECLARATION OF CONFORMITY \(CE\)](#)